

MaxLite[®]

A NEW WAVE OF LIGHT

PRODUCT CATALOG



Our Vision: Transform the way people experience light

MaxLite has provided certified energy-efficient lighting solutions to the commercial building, industrial, residential and OEM markets since 1993. One of the first movers into LED technology in the industry, MaxLite offers an extensive line of indoor and outdoor LED lamps and luminaires. We are a five-time recipient of the ENERGY STAR® Partner of the Year Award for our industry leadership and continue to be at the forefront of energy-efficient technologies through innovative product research and development.

Our Products:

MaxLite supports our products with industry-leading warranties and customer support. Most MaxLite products are certified by ENERGY STAR® or listed by DesignLights Consortium® (DLC) and qualify for utility rebate programs. We also offer a large selection of lamps and luminaires that meet Title 20 and Title 24 JA8-2016/2019-E requirements in California. Our products are stocked for immediate purchase and delivery, shipping within the United States in two business days on standard orders.

Our Services:

We work with our customers to ensure that our products meet the needs of their installation by providing a full range of complimentary services, including:

- Facility audits
- ROI calculations
- Local representation
- Lighting layouts
- Utility rebate assistance
- Lifetime product support



(HQ) Pinebrook, NJ



Greenwood, IN



Anaheim, CA



Nationally Certified Minority Business Enterprise

MaxLite is a nationally certified Minority Business Enterprise (MBE) by the National Minority Supplier Diversity Council (NMSDC). We also hold state-level MBE certifications - contact us for details.



10-Year Warranty - Labor Included!*

MaxLite offers a 10-year limited warranty on most LED indoor and outdoor fixtures.

Go to [MaxLite.com/warranties](https://www.maxlite.com/warranties) for applicable terms and conditions.

*registration required

Design Innovation



Our products have received numerous awards, including:



Key Distribution Segments & Strengths

STOCK & FLOW
Counter Business MRO




PROJECT SALES
Quick Ship



DESIGN-BUILD
Value Engineered



ENERGY SERVICES
ESCO



NATIONAL ACCOUNTS
National Chains



CONTROLS

c-Max™ Overview 2
 c-Max™ Network Controls 3-5
 c-Max™ Basic Controls 6-7
 c-Max™ Network Partners 8-9

INDOOR LED FIXTURES

BayMax™ HLS Series - Enhanced Linear Highbays 10-11
 HLE Series - Value Linear Highbays 12-13
 BayMax™ HL3 Series - Linear Highbays 13
 BayMax™ BPHE3 Series - Value Round Highbays 14
 BayMax™ BPHE2 Series - Eco Round Highbays 14
 LSV Series - Enhanced Vapor Tight Fixtures 15
 VE Series - Value Vapor Tight Fixtures 16
 LSU Series - Enhanced Utility Wrap Fixtures 16-17
 UE Series - Value Utility Wrap Fixtures 17
 LS3 Series - Enhanced Linear Strip Fixtures 18
 LSE Series - Value Linear Strip Fixtures 19
 RS2 Series - Enhanced Linear Strip Retrofits 19
 LED T8 Lamp Ready 4' Vapor Tights 20
 LED T8 Lamp Ready 4' Utility Wraps 20
 LED T8 Lamp Ready 4' Linear Utility Strips 20
 LED T5 Lamp Ready 4' Utility Strips 20
 LED T8/T5 Lamp Ready 4' High Bays 21
 LED T8 Lamp Ready 4' Retrofit Strip 21
 FlatMax™ MLFP G5 Series - Enhanced Flat Panels 22
 MLFPE Series Value Flat Panels 23
 MLFPE Series - Direct/Indirect Pendant Panels 23
 ArcMax™ MLVT G2 Series Enhanced Troffers 24
 TV Series Value Troffers 25
 FPR Series - Enhanced Panel Retrofit Kit 26
 TRK G2 Series - Enhanced Troffer Retrofit Kit 28
 TRKE Series - Value Troffer Retrofit Kit 29
 MRBK Series - Value Magnetic Bar Retrofit Kits 30
 RRCX Series - Enhanced Architectural Downlights 31
 Select the Reflector/Optional New Construction Frame 31
 RCF Series - Value Triac Dimming Commercial Downlights 32
 RCF Series - Value 0-10V Dimming Commercial Downlights 33
 RCF - Triac Dimming Commercial Downlights 34
 RCF - 0-10V Dimming Commercial Downlights 34-35
 Litebars 36
 Optional Accessories 36
 LED Shop Light Single/Two Tubes 37

RESIDENTIAL FIXTURES

LED 120-277V Residential Retrofit Downlight w/Selectable CCT 38
 LED Adjustable Residential Retrofit Downlight w/Selectable CCT 38
 LED Round Slim Downlights w/Selectable CCT 39
 LED Slim Downlight Baffle Style Round CCT Select 39
 LED Disc Light w/Selectable CCT 39
 LED Architectural/Fleming Vanity Bar w/Selectable CCT 40
 LED Tulip Vanity Bar 40
 LED Flush Mounts - Traditional Series 41
 LED Flush Mounts - Architectural Series w/Selectable CCT 41
 LED Flush Mounts - Puff Series w/Selectable CCT 42
 LED Flush Mounts - Fleming Series w/Selectable CCT 42
 Bulb in Box: Architectural Torchiere 43
 Bulb in Box: Ranch/Pagonda Outdoor Lantern 43
 LED Coach/Ranch/Mission Lantern 44
 LED Traditional Lantern 45
 LED PureAirMax™ Tabletop Air Purifier 45
 LED Garage Light 4 Panel 45
 Smart Wall Plug, Plug Strip 45

OUTDOOR LED FIXTURES

M Series™ Area Fixtures 46
 AE Area Fixtures 46-47
 Barn Lights 47
 Post Top Spider Mount 47
 Enhanced Canopy/Parking Luminaires 48
 Value Canopy/Parking Luminaires 48
 PathMax™ Classic/Slim Bollards Series 49
 M Series™ Floods 50
 FieldMax™ Sports/High Output Floods 50
 FloodMax™ LED Flood Lights 51

OUTDOOR LED FIXTURES

Slim Flood Lights/CCT & Wattage Slectable 51-52
 Bullet Flood Lights 52
 Steel 4"/5" Straight Square Poles 52-53
 Aluminum 4"/5" Straight Square Poles 53
 Steel 3"/4"/5" Straight Round Poles 53-54
 Aluminum 5" Straight Round Poles 54
 Mounting Accessories 54-55
 GuardMax™ Oval Wall Packs 55
 GuardMax™ Slim Security Light/DLC 56
 GuardMax™ Emergency Motion Sensor Security Light 56
 LED Lamp Included Vaporproof Jelly Jars 57
 LED Integrated Adjustable Vaporproof Jelly Jars w/Selectable CCT 57
 M Series™ Wall Mounts 57-58
 WallMax™ Cut Off Wall Packs 58
 WallMax™ Thin Cutoff Wall Packs 59
 WallMax™ Open Face Wall Packs 59-60
 WallMax™ Compact Open Face Wall Packs 60

HARSH & HAZARDOUS

Flood Class I Division 1 HL-AR-D1 Series 61
 Flood Class I Division 2 HL-AR Series 61
 Wall Pack Class I Division 2 HL-WP Series 61
 Linear Class I Division 2 HL-LI Series 62
 Linear Class I Division 2 HL-LI Series 62
 High Bay Class I Division 2 HLRS Series 62
 High Bay Class I Division 2 HLRM Series 63
 Low Bay/Jelly Jar Class I Division 2 HLRS Series 63

EXIT & EMERGENCY

LED Emergency Lights 64
 LED High Capacity Emergency Lights 64
 LED Remote Heads 64
 LED High Capacity Remote Heads 64
 LED Exit Signs 65
 LED Exit Sign Combos 65
 LED Edgelit Exit Signs 65
 LED Aluminum Exit amd Combo Signs 65

GENERAL PURPOSE LAMPS

LED A19/A21 Clear/Frosted Filament Lamps JA8 66-67
 LED ST19 Clear/Vintage Filament Lamps JA8 68-70
 LED B10 Frosted/Clear Filament Candelabras JA8 70-72
 LED T12/T10/S14 Clear/Frosted Filament Lamps 73
 LED G16.5, G25, G40 Frosted/Clear Filament Lamps JA8 74-77
 LED G16/G25 Globe Lamps 77
 LED Dimmable Enclosed Rated A-Lamps 78
 LED High Output Dimmable/Non-Dimmable A-Lamps 79
 LED A21 3-Way A-Lamps 79
 LED A19 Wingstack A-Lamps 80
 LED Smart A19 Lamp 81
 LED CCT Selectable A-Lamps and DTD A-Lamps 81
 LED PL Retrofit Lamps Ballast Bypass 82
 LED PL Retrofit Lamps DirectFit w/selectable CCT 83
 LED PLL Retrofit DirectFit/Bypass Lamps 83
 LED MR16 Base Lamps 84-85
 LED BR/R Dimmable Lamps 85
 LED PAR Lamps, Dimmable/277V/High Output/Value 86-87
 LED T8 U-Bend Lamp, Direct Fit/Ballast Bypass 88
 LED T8 Type A - Direct Fit 89
 LED T8 Type B - Ballast Bypass 90-93
 LED T5 Type B - Ballast Bypass 93
 LED Battery Back Up 94
 LED Emergency Battery Back Up Type B/C Linear Lamps 94
 LED Single End Wiring Harnesses 94
 LED T8 (G13) Non-Shunted Lamp Holders 95
 LED Retrofit Miniature Lamps 95
 LED Highbay Ballast Bypass Lamps 96
 LED Post Tops 96

cMax™

LIGHTING CONTROLS



Simple, Versatile, Future Ready and Scalable Technology

c-Max™ is a true plug-and-play platform that offers multi-tier control solutions. Experience the innovation of the integrated USB-C receptacles across a broad set of MaxLite's controls ready indoor and outdoor fixtures that makes it easy to add Luminaire Level Lighting Control (LLLC). Pair c-Max sensors/nodes with the correct CR fixtures and you are all set! With a broad offering of sensors, network nodes, zone controllers and accessories, c-Max Lighting controls adapts easily from small to large installation projects. From stand-alone Basic to DLC NLC qualified Network to enterprise-level controls, c-Max provides scale and affordable solutions for facilities to save energy, improve occupant comfort and achieve code compliance.



Simple

- Easy DIY installation - low voltage sensor plugs into USB-C receptacle on MaxLite controls ready fixture
- Easy commissioning (Via remote or iOS or Android app)
- Easy on budget - affordable and scalable solution





Versatile

- Scale across both indoor and outdoor product portfolio
- Multiple energy-saving features packed in small form factor
- Choose from a variety of devices including sensors, network nodes and powerpack



Future Ready

- Plug-and-play interface makes it easy to add controls during installation or later
- Upgrade from non-networked to Network controls without removing the fixture
- Scalable technology choices - agnostic to controls technology and connectivity protocols

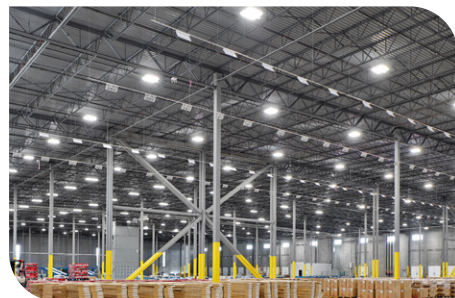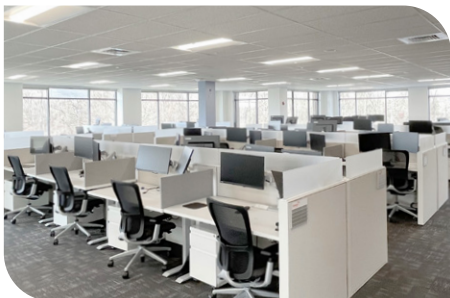

Visit www.maxlite.com/cmox for how-to videos, FAQs and more!



NETWORK LIGHTING CONTROLS

Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	106059	NN-RTPSW	Network Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	106001	NN-RTVSW	Network Node Rectangular, Vacancy Sensor, White	Indoor	Bluetooth, Motion Sensor (PIR), Vacancy Sensor, High Trim, Scenes, Schedules
	105893	NN-RTDHW	Network Node Rectangular, Daylight Harvesting, White	Indoor	Bluetooth, Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	111459	NN-RDMPBXR	Network Node Round, PIR Motion Sensor, Photocell, Black, Extended (XR) Range	Outdoor	Bluetooth, Motion Sensor (PIR), Photocell (On/Off), High Trim, Scenes, Schedules
	105905	NN-RDMSW	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	108688	NNA-RDMSW	Network Node (AJ) Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Integral Nodes

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105892	NN-RTW	Network Node Rectangular, White	Indoor & Outdoor	Bluetooth, High Trim, Scenes, Schedules
	105895	NN-MGT	Network Node Magnet, Translucent	Indoor	Bluetooth, Magnetic, High Trim, Scenes, Schedules
	105897	NN-RDB	Network Node Round Bronze Or White	Indoor & Outdoor	Bluetooth, High Trim, Scenes, Schedules
	106391	NN-RDW			
	109413	NNA-RDW	Network Node W/ Audio Jack, Round, Bluetooth, 12VDC, White	Indoor	Bluetooth, High Trim, Scenes, Schedules

Wall Switches

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	109498	WNS3U-W	120-277V 3-button Network Wall Switch, Bluetooth, White	Indoor	AC, Bluetooth, On/Off, Dim Up/Dim Down
	109499	WNS7U-W	120-277V 7-button Network Wall Switch, Bluetooth, White	Indoor	AC, Bluetooth, On/Off, 4 Programmable Scenes, Dim Up/Dim Down
	111401	WNS8-W	8 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Scenes, Manual Dimming
	108392	WNS5-W	5 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Scenes, Manual Dimming
	109111	WNS3-W	3 Button Network Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off, Manual Dimming
	109112	WNS1-W	1 Button Wall Switch, Bluetooth, White	Indoor	Battery, Bluetooth, On/Off



Relays

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	106318	NPP-300W	120-277V Network Power Pack 300W Max	Indoor	<i>Bluetooth, High Trim, Scenes, Schedules</i>
	110750	PPA-06A	12V POWER PACK, 6A, 120-277V	Indoor	<i>Bluetooth, High Trim, Scenes, Schedules</i>
	109113 111764	NPP-ZC20A NPP-ZC20A-V2	120-277V Network Zone Controller 20A 0-10V 120-277V Network Zone Controller 20A 0-10V with 12V Aux	Indoor	<i>Bluetooth, High Trim, Scenes, Schedules</i>
	109329	NPP-PL20A	Network Power Pack - Plug Load 20A With Dry Contacts	Indoor	<i>Bluetooth, High Trim, Plug Load, Schedules</i>
	106904	CNS-PSW	120-277V Network Relay PIR Motion Sensor, Daylight Harvest, White	Indoor	<i>Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules</i>

Ceiling Mounted Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	107788	NPPSL-PSW*	Network Power Pack PIR Sensor, 12V, White	Indoor	<i>Motion Sensor (PIR)</i>
	107791	CNSL-PSW**	Network Sensor 12V, Bluetooth/ Pir Motion Sensor /Daylight Harvest, White	Indoor	<i>Bluetooth, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules</i>

Accessories

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	109114	NPP-EM	120-277V Network UL924 Wireless Emergency Module	Indoor	<i>Bluetooth, UL924</i>
	108859	NN-RTC	Network Node Real Time Clock Sync Device	Indoor & Outdoor	<i>Real Time Clock</i>
	109419	NN-BRG01	c-Max Network Bridge -3rd Party Integration	Indoor	<i>Ability to connect to 3rd party systems</i>
	109438	ISSY994-CMAX-OADR	Open ADR Demand Response Gateway	Indoor	<i>Open ADR, Demand Response</i>
	108860	NN-EDC	Network Node Energy Data Collector	Indoor & Outdoor	<i>Energy Monitoring + Real Time clock</i>
	107785	CEA-RDB***	c-Max External Adapter Round Bronze Or White	Indoor & Outdoor	<i>Adapter Paired with Sensors and Nodes</i>
	106903	CEA-RDW***			

*Needs to be paired with NPP-300W

**May be paired with the NPP-300W or PPA-06A to enable daylight harvesting or could be powered directly with MaxLite CR fixtures

***Adapter compatible with c-Max Network and c-Max Basic round sensors/nodes

c-Max Relays and Ceiling Mounted Sensors can be used with MaxLite or other non-MaxLite luminaires



Pair c-Max Network Nodes with Controls-Ready MaxLite products today, or in the future!



Patent Pending vandal-resistant design with locking screw that secures sensor to fixture.



Controls Ready Fixtures

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! (See individual product datasheets for available controls options and ordering information)

INDOOR						
NETWORK NODE	Flat Panels, ArcMax Troffer, FPR Retrofit, TRK Retrofit	LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	ECO High Bay	Linear High Bay	Round High Bay	Magnetic Retrofit Bar Kit
NN-RTPSW*						
NN-RTDHW						
NN-RTW						
CEA-RDW						
NN-RDMSW**						
NN-RDW						
NNA-RDMSW						
NNA-RDW						
NN-MGT						

*PIR requires line of sight and cannot not be used in products behind the lens. **To use NN-RDMSW with the above linear and highbay products, the CEA-RDW External adapter also needs to be purchased separately

OUTDOOR							
NETWORK NODE	Open Face Wall Pack	Cutoff Wall Pack	Barn Light	Canopy	M Series	AE Slim Area Light	PathMax Slim Bollards
NN-RTW							
CEA-RDB**							
NN-RDMPBXR							
NN-RDB							

*PIR requires line of sight and cannot not be used in products behind the lens. **Round nodes (NN-RD***) can be used with the CEA-RDB External Adapter

Additional Resources:

Visit www.maxlite.com/cmax-network-lighting-controls for how-to videos, FAQs and more!

Download the c-Max App



BASIC LIGHTING CONTROLS

Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105564	CN-RTMST	Control Node Rectangular, Microwave Motion Sensor/Photocell, Translucent	Indoor & Outdoor	High Trim, Motion Sensing (Microwave), Photocell, Daylight Harvesting (on/off)
	105890	CN-RTPSW	Control Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)
	105891	CN-MGMST	Control Node Rectangular, Microwave Motion Sensor/Photocell, Translucent	Indoor	High Trim, Motion Sensing (Microwave), Photocell, Daylight Harvesting (on/off)
	105565	CN-RDMSW	Control Node Round, PIR Motion Sensor/Photocell, White, IP66	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)
	111456	CN-RDMSB-V2	Control Node Round, Pir Motion Sensor/Photocell, Bronze, IP66, Version 2	Outdoor	High Trim, Motion Sensing (PIR), Photocell
	108689	CNA-RDMSW	Basic Control Node (AJ) Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	High Trim, Motion Sensing (PIR), Photocell, Daylight Harvesting (continuous adjustment mode)

Integral Photocells

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105568	CN-RTPCT	Photocell Node Rectangular, Translucent	Outdoor	Photocell
	105569	CN-RDPCB	Photocell Node Round, Bronze, IP66	Outdoor	Photocell


Accessories

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	105567	CN-REMOTE	Control Node Remote Control	Indoor & Outdoor	To be used with CN-RTMST, CN-RTPSW, CN-RDMSW, CN-RDMSB, CN-MGMST
	107785	CEA-RDB**	C-Max External Adapter Round Bronze Or White	Indoor & Outdoor	Adapter Paired with Round Nodes
	106903	CEA-RDW**			

**Adapter compatible with c-Max Network & c-Max Basic Controls



Pair c-Max Basic Nodes with Controls-Ready MaxLite products today, or in the future!

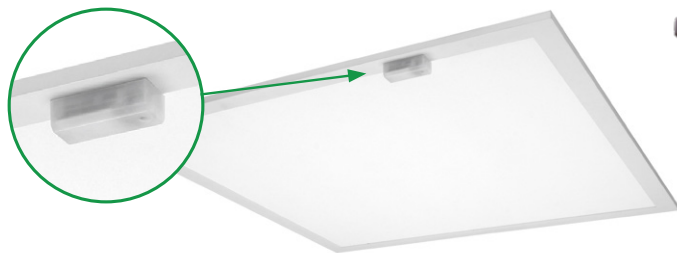

Patent Pending vandal-resistant design with locking screw that secures sensor to fixture.



Controls Ready Fixtures

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! (See individual product datasheets for available controls options and ordering information)

INDOOR							
SENSOR		FlatMax Flat Panels, ArcMax Troffer, FPR Retrofit, TRK Retrofit	LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	ECO High Bay	Linear High Bay	Round High Bay	Magnetic Retrofit Bar Kit or Type C Kit
CN-RTMST†	Microwave						
CN-RTPSW	PIR						
CEA-RDW	Adapter						
CN-RDMSW**	PIR						
CNA-RDMSW	PIR						
CN-MGMST	Microwave						

† Must remove the sensor cover on the ArcMax Troffer, TRK Retrofit and LS Strip to fit.

*PIR requires line of sight and cannot not be used in products behind the lens. Compatible with LS and RS Linear fixtures only.

**To use CN-RDMSW with the LSV, LSU and Eco Highbay products, the CEA-RDW External adapter also needs to be purchased separately

OUTDOOR								
SENSOR	TECHNOLOGY	Open Face Wall Pack	Cutoff Wall Pack	Barn Light	Canopy	M Series	AE Slim Area Light	PathMax Slim Bollards
CN-RTMST	Microwave							
CN-RTPCT	Photocell							
CN-RDMSB-V2	PIR*							
CN-RDPCB	Photocell							

*PIR requires line of sight and cannot not be used in products behind the lens

Additional Resources:

Visit www.maxlite.com/cmax-basic-lighting-controls for how-to videos, FAQs and more!



Technology Partner
SILVAIR

NETWORK PARTNERS

Integral Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	110431	NN-RTPSW-SL	Network Node Rectangular, PIR Motion Sensor/Daylight Harvesting, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules
	105905	NN-RDMSW-SL	Network Node Round, PIR Motion Sensor, Daylight Harvesting, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

Integral Nodes

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111148	NN-RTW-SL	Network Node Rectangular, White	Indoor	Bluetooth®, High Trim, Scenes, Schedules
	111149	NN-RDW-SL	Network Node Round Bronze Or White	Indoor	Bluetooth®, High Trim, Scenes, Schedules

Wall Switches

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111135	WNS1RK-W	Single Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming
	111136	WNS2RK-W	Double Rocker Kinetic Wireless Switch	Indoor	Bluetooth®, On/Off, Manual Dimming, Scenes
	111137	WNS1DU-W-SL	Network Silvair Dimmer Wireless Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming
	111139	WNS1PU-W-SL	Network Silvair Dimmer Occupancy Wall Switch	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, PIR Motion Sensor
	111144	WNS4SU-W-SL	Network Silvair Dimmer Wireless 4-Button Wall Controller	Indoor	120-277V, Bluetooth®, On/Off, Manual Dimming, Scenes

Relays

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	110876	NPP-ZC20A-SL	120-277V Network Zone Controller 20A 0-10V	Indoor	Bluetooth®, High Trim, Scenes, Schedules, Plug Load

Ceiling Mounted Sensors

CONTROL IMAGE	ORDER CODE	ITEM #	DESCRIPTION	APPLICATION	FEATURES
	111145	CNSL-PSW-SL**	Network Sensor 12V, Bluetooth®/ PIR Motion Sensor /Daylight Harvest, White	Indoor	Bluetooth®, Motion Sensor (PIR), Daylight Harvesting (continuous adjustment), High Trim, Scenes, Schedules

**May be paired with a 12V powerpack or could be powered directly with MaxLite CR fixtures





Pair c-Max Network Partner Nodes with Controls-Ready MaxLite products today, or in the future!



Patented vandal-resistant design with locking screw that secures sensor to fixture.



Controls Ready Fixtures

MaxLite Controls Ready (CR) fixtures allow for quick and easy in-field installation of controls. Simply purchase any CR fixture and the required Controls Node and you're all set! (See individual product datasheets for available controls options and ordering information)

INDOOR				
NETWORK NODE	Flat Panels, FPR Retrofit, ArcMax Troffer, TRK Retrofit	LS Strip, RS Retrofit Strip, LSV Vapor Tight, LSU Utility Wrap	ECO High Bay	Linear High Bay
NN-RTPSW-SL				
NN-RTW-SL				
CEA-RDW				
NN-RDMSW-SL				
NN-RDW-SL				

Additional Resources:

Visit www.maxlite.com/cmax-network-partners for how-to videos, FAQs and more!

Download the Silvr App

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



		1.4'		
MODEL NUMBER	HLS-078WUF-CSCR HLS-078WUF-CSCRTA			
ORDER CODE	110407 110888			
Input Wattage	78W	92W	115W	
Voltage	120-277V			
Delivered Lumens (lm)	12010, 12090	13980, 14070	17250, 17360	
Efficacy (lm/W)	154, 155	152, 153	150, 151	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



		1.9'		
MODEL NUMBER	HLS-155UF-CSCR HLS-155UF-CSCRTA			
ORDER CODE	110409 110894			
Input Wattage	155W			
Voltage	120-277V			
Delivered Lumens (lm)	23400, 23250			
Efficacy (lm/W)	151, 150			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

BayMax™ HLS Series - Enhanced Linear Highbays



CCTs Selectable:



		1.9'		
MODEL NUMBER	HLS-135WUF-CSCR HLS-135WUF-CSCRTA			
ORDER CODE	110701 110892			
Input Wattage	135W	155W	185W	
Voltage	120-277V			
Delivered Lumens (lm)	20790, 20920	23560, 23710	27750, 27930	
Efficacy (lm/W)	154, 155	152, 153	150, 151	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			



BayMax™ HLS Series - Enhanced Linear Highbays



2.6'



CCTs Selectable:



MODEL NUMBER	HLS-200WUF-CSCR HLS-200WUF-CSCRTA		
ORDER CODE	1104011 110898		
Input Wattage	200W	230W	270W
Voltage	120-277V		
Delivered Lumens (lm)	30800, 31000	34960, 35190	40500, 40770
Efficacy (lm/W)	154, 155	152, 153	150, 151
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

BayMax™ HLS Series - Enhanced Linear Highbays




3.7'



CCTs Selectable:



MODEL NUMBER	HLS-270WUF-CSCR HLS-270WUF-CSCRTA		
ORDER CODE	1104012 110968		
Input Wattage	270W	340W	400W
Voltage	120-277V		
Delivered Lumens (lm)	41580, 41850	51680, 52020	60000, 60400
Efficacy (lm/W)	154, 155	152, 153	150, 151
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

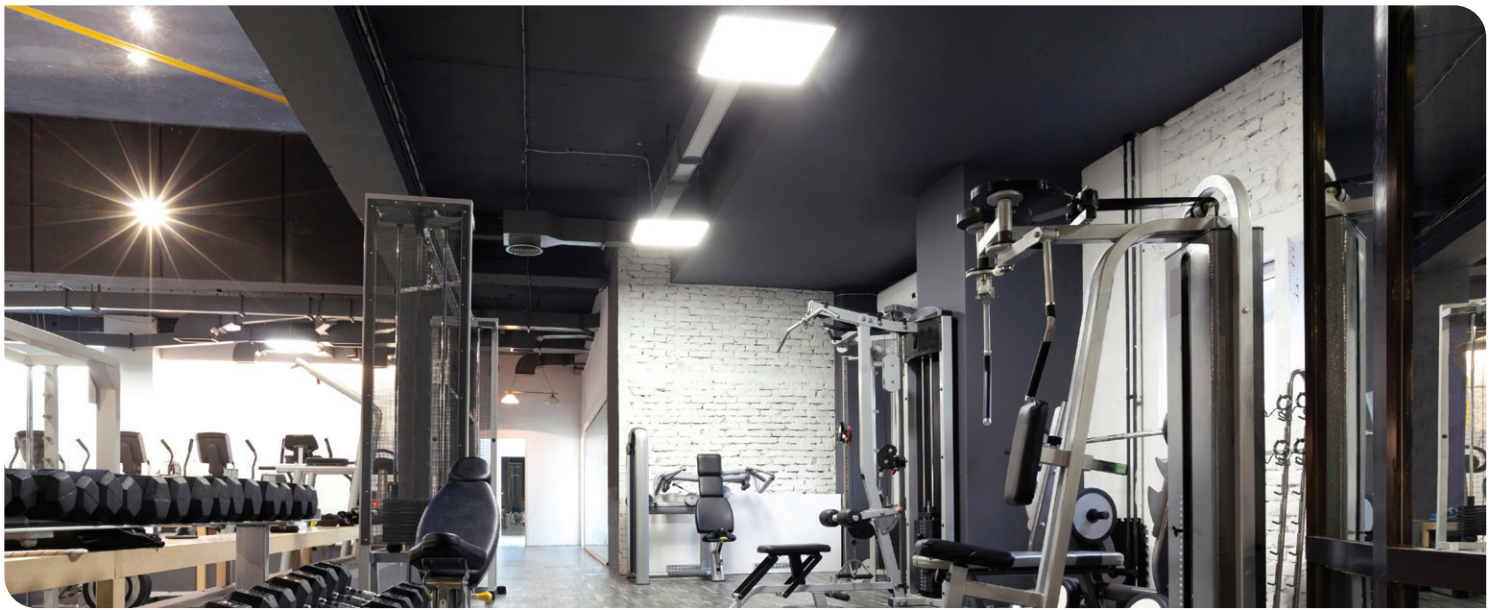

HLE Series Value Linear Highbays



CCTs Selectable:



		1.4'		
MODEL NUMBER	HLE-100WUF-CS			
ORDER CODE	110858			
Input Wattage	100W	115W	135W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	15,000 lm	17,250 lm	20,250 lm	
Efficacy (lm/W)	150 lm/W	150 lm/W	150 lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	50,000 hrs			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLE Series Value Linear Highbays



CCTs Selectable:



		1.9'		
MODEL NUMBER	HLE-135WUF-CS			
ORDER CODE	110859			
Input Wattage	135W	155W	185W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	20,250 lm	23,250 lm	27,750 lm	
Efficacy (lm/W)	150 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	50,000 hrs			
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC			

HLE Series Value Linear Highbays



2.6'

MODEL NUMBER	HLE-200WUF-CS		
ORDER CODE	110860		
Input Wattage	200W	230W	270W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	30,000 lm	34,500 lm	40,500 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hrs		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

CCTs Selectable:



BayMax™ HLE Series Value Linear Highbays



3.7'

MODEL NUMBER	HLE-270WUF-CS		
ORDER CODE	110861		
Input Wattage	270W	340W	400W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	40,500 lm	51,000 lm	60,000 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hrs		
LISTINGS	DLC Premium, UL listed, RoHS Compliant, FCC		

CCTs Selectable:



BayMax™ HL3 Series Linear Highbays



1.5'

MODEL NUMBER	HL3-078UF-CSCR	HL3-115UF-CSCR
ORDER CODE	108430	108432
Input Wattage	78W	115W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	11,700/11,778 lm	17,250/17,365 lm
Efficacy (lm/W)	150 lm/W	
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	4000K/5000K	
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	≥100,000 hours	
LISTINGS	DLC Premium, UL, FCC	

CCTs Selectable:



BayMax™ BPHE3 Series Value Round Highbays



CCTs Selectable:



MODEL NUMBER	BPHE3-U090WCS		
ORDER CODE	110034		
Input Wattage	90W	120W	150W
Voltage	120-277V		
Delivered Lumens (lm)	12150, 13500, 12600 lm	16200, 18000, 16800 lm	21700, 23100, 21900 lm
Efficacy (lm/W)	135, 150, 140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	100,000 hours based on 25°C		
LISTINGS	ETL, Wet, FCC, DLC Premium, IP65, NSF		

BayMax™ BPHE3 Series Value Round Highbays



CCTs Selectable:



MODEL NUMBER	BPHE3-U180WCS		
ORDER CODE	111106		
Input Wattage	180W	200W	240W
Voltage	120-277V		
Delivered Lumens (lm)	24500, 27000, 25200 lm	27000, 30000, 28000 lm	32100, 35100, 33400 lm
Efficacy (lm/W)	135, 150, 140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	100,000 hours based on 25°C		
LISTINGS	ETL, Wet, FCC, DLC Premium, IP65, NSF		

BayMax™ BPHE2 Series Eco Round Highbays



CCTs Selectable:



MODEL NUMBER	BPHE2-U100CS		
ORDER CODE	108636		
Input Wattage	100W		
Voltage	120-277V		
Delivered Lumens (lm)	13,500/14,800/14,000 lm		
Efficacy (lm/W)	135-148 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	ETL, Wet, FCC, DLC Premium, IP65		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV2U20WCSCR		
ORDER CODE	105606		
Input Wattage	20W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2,852/2,944/2,888 lm	3,445/3,661/3,544 lm	4,173/4,255/4,113 lm
Efficacy (lm/W)	142/149/144 lm/W	146/154/146 lm/W	143/146/142 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV4U23WCSCR		
ORDER CODE	105607		
Input Wattage	23W	35W	48W
Voltage	120-277V		
Delivered Lumens (lm)	3,429/3,483/3,430 lm	4,677/4,782/4,687 lm	6,429/6,609/6,342 lm
Efficacy (lm/W)	146/150/146 lm/W	142/149/143 lm/W	146/145/135 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

LSV Series - Enhanced Vapor Tight Fixtures



CCTs Selectable:



MODEL NUMBER	LSV8U65WCS		
ORDER CODE	105687		
Input Wattage	65W	75W	90W
Voltage	120-277V		
Delivered Lumens (lm)	8,840/8,905/9,620 lm	9,975/10,050/10,125 lm	11,700/11,790/11,880 lm
Efficacy (lm/W)	136/137/148 lm/W	133/134/135 lm/W	130/131/132 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

VE Series - 4' Value Vapor Tight Fixtures



4'

MODEL NUMBER	VE-4U23WCS		
ORDER CODE	111226		
Input Wattage	26W	38W	50W
Voltage	120-277V		
Delivered Lumens (lm)	3,200 lm	4,700 lm	6,240 lm
Efficacy (lm/W)	137 lm/W	150 lm/W	141 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

CCTs Selectable:



VE Series - 8' Value Vapor Tight Fixtures



8'

MODEL NUMBER	VE-8U65WCS		
ORDER CODE	111227		
Input Wattage	65W	75W	90W
Voltage	120-277V		
Delivered Lumens (lm)	8,800 lm	10,000 lm	11,700 lm
Efficacy (lm/W)	140 lm/W	155 lm/W	143 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500/4000/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, Wet, FCC, DLC Premium, IP65		

CCTs Selectable:



LSU Series - 2' Enhanced Utility Wrap Fixtures



LSU2U20WCSCR

MODEL NUMBER	LSU2U20WCSCR		
ORDER CODE	105658		
Input Wattage	20W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2,781/2,843/2,774 lm	3,292/3,398/3,285 lm	3,847/3,964/3,796 lm
Efficacy (lm/W)	132/138/132 lm/W	131/138/130 lm/W	131/138/128 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

CCTs Selectable:



LSU Series - 4' Enhanced Utility Wrap Fixtures



CCTs Selectable:



MODEL NUMBER	LSU4U23WCSCR		
ORDER CODE	105664		
Input Wattage	23W	35W	48W
Voltage	120-277V		
Delivered Lumens (lm)	3,408/3,432/3,456 lm	4,692/4,726/4,760 lm	6,070/6,472/6,366 lm
Efficacy (lm/W)	142/143/144 lm/W	138/139/140 lm/W	129/142/135 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

UE Series - 2' Value Utility Wrap Fixtures



CCTs Selectable:



2'

MODEL NUMBER	UE-2U20WCS		
ORDER CODE	111192		
Input Wattage	20W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2700, 2800, 2700 lm	3250, 3500, 3250 lm	3900, 4200, 3900 lm
Efficacy (lm/W)	130 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

UE Series - Value Utility Wrap Fixtures



CCTs Selectable:



4'

MODEL NUMBER	UE-4U23WCS		
ORDER CODE	111193		
Input Wattage	26W	34W	46W
Voltage	120-277V		
Delivered Lumens (lm)	3600, 3800, 3600 lm	4500, 4800, 4500 lm	6000, 6200, 6000 lm
Efficacy (lm/W)	130 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium		

LS3 Series - 2' Enhanced Linear Strip Fixtures



CCTs Selectable:



		2'		
MODEL NUMBER	LS3-2U15WCSCR LS3-2U15WCSCRTA			
ORDER CODE	110412 110968			
Input Wattage	15W	20W	25W	
Voltage	120-277V			
Delivered Lumens (lm)	N/A			
Efficacy (lm/W)	136, 146, 139	144, 154, 147	134, 144, 137	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, FCC, DLC Premium, DLC			

LS3 Series - 4' Enhanced Linear Strip Fixtures



CCTs Selectable:



		4'		
MODEL NUMBER	LS3-4U23WCSCR LS3-4U23WCSCRTA			
ORDER CODE	110525 110995			
Input Wattage	23W	34W	47W	
Voltage	120-277V			
Delivered Lumens (lm)	1200lm (EM suffix), 1000lm (E2 suffix)			
Efficacy (lm/W)	145, 155, 147	138, 148, 140	130, 140, 132	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, FCC, DLC Premium, DLC			

LS3 Series - 8' Enhanced Linear Strip Fixtures



CCTs Selectable:



		8'		
MODEL NUMBER	LS3-8U65WCSCR LS3-8U65WCSCRTA			
ORDER CODE	110526 110997			
Input Wattage	65W	75W	90W	
Voltage	120-277V			
Delivered Lumens (lm)	9230, 9880, 9360	10500, 11250, 10570	11970, 12870, 12150	
Efficacy (lm/W)	142, 152, 144	140, 150, 141	133, 143, 135	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, FCC, DLC Premium, DLC			

LSE Series - 4' Value Linear Strip Fixtures



4'

MODEL NUMBER	LSE-4U34WCS		
ORDER CODE	111027		
Input Wattage	34W	38W	45W
Voltage	120-277V		
Delivered Lumens (lm)	4620, 4960, 4690	5050, 5430, 5130	5850, 6300, 5940
Efficacy (lm/W)	136, 146, 138	133, 143, 135	130, 140, 132
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium, DLC		

CCTs Selectable:



LSE Series - 8' Value Linear Strip Fixtures



8'

MODEL NUMBER	LSE-8U55WCS		
ORDER CODE	111022		
Input Wattage	55W	60W	65W
Voltage	120-277V		
Delivered Lumens (lm)	7480, 8030, 7590	7980, 8580, 8100	8450, 9100, 8580
Efficacy (lm/W)	136, 146, 138	133, 143, 135	130, 140, 132
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, FCC, DLC Premium, DLC		

CCTs Selectable:



RS2 Series - 4', 8' Enhanced Linear Strip Retrofits




4'

8'

MODEL NUMBER	RS2-4U23WCSCR	RS2-8U65WCSCR
ORDER CODE	109257	109258
Input Wattage	23W	65W
Voltage	120-277V	
Delivered Lumens (lm)	3,330 lm	8,710 lm
Efficacy (lm/W)	145 lm/w	134 lm/w
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3500K/4000K/5000K	
Replacement	RS2-4LENS	RS2-8LENS
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	100,000 hours	
LISTINGS	UL, Damp, FCC, DLC	

CCTs Selectable:



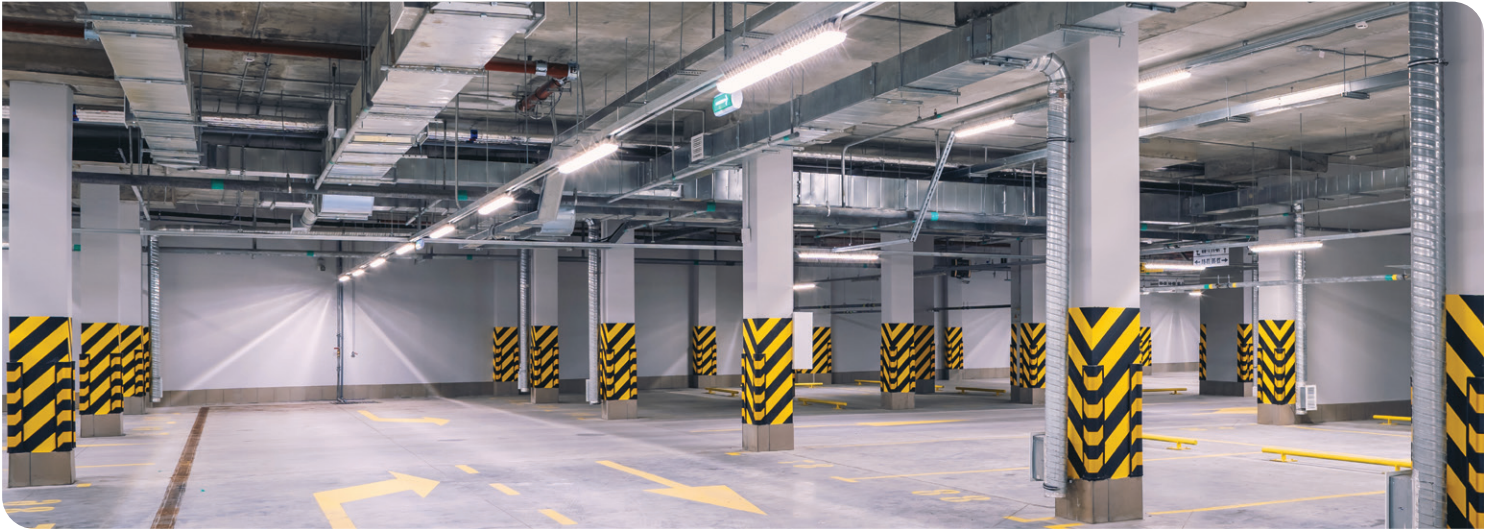

LED T8 Lamp Ready 4' Vapor Tights



MODEL NUMBER	LSV2XT8USE4806	LSV3XT8USE4806
ORDER CODE	74850	74851
Number of Lamps	2 x T8 LED	3 x T8 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Pages 88-93 for compatible T8 lamps

LED T8 Lamp Ready 4' Utility Wraps



MODEL NUMBER	LSU2XT8USE4806	LSU3XT8USE4806	LSU4XT8USE4812
ORDER CODE	75304	75305	14098811
Number of Lamps	2 x T8 LED	3 x T8 LED	4 x T8 LED
Voltage	120-277V		
Max Wattage	22W Per Lamp		
LISTINGS	UL (Damp Listed)		

See Pages 88-93 for compatible T8 lamps

LED T8 Lamp Ready 4' Linear Utility Strips



MODEL NUMBER	LSS1XT8USE4802	LSS2XT8USE4803
ORDER CODE	75302	75303
Number of Lamps	1 x T8 LED	2 x T8 LED
Voltage	120-277V	120-277V
Max Wattage	22W Per Lamp	22W Per Lamp
LISTINGS	UL (Damp Listed)	UL (Damp Listed)

See Pages 88-93 for compatible T8 lamps


LED T5 Lamp Ready 4' Utility Strip



MODEL NUMBER	LSS1XT5USE4802	LSS2XT5USE4803
ORDER CODE	14100561	14100562
Number of Lamps	1 x T5 LED	2 x T5 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Page 93 for compatible T5 lamps.

LED T8 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT8USE4810	BLHT6XT8USE4815	BLHT8XT8USE4820
ORDER CODE	75428	75429	75430
Number of Lamps	4 x T8 LED	6 x T8 LED	8 x T8 LED
Voltage	120-277V		
Max Wattage	22W Per Lamp		
LISTINGS	UL (Damp Listed)		

See Pages 74-75 for compatible T8 lamps.

LED T5 Lamp Ready 4' High Bays



MODEL NUMBER	BLHT4XT5USE4810	BLHT6XT5USE4815
ORDER CODE	14099836	14099837
Number of Lamps	4 x T5 LED	6 x T5 LED
Voltage	120-277V	
Max Wattage	22W Per Lamp	
LISTINGS	UL (Damp Listed)	

See Page 93 for compatible T5 lamps.

LED T8 Lamp Ready 4' Retrofit Strip



MODEL NUMBER	RS-482XT8
ORDER CODE	107768
Number of Lamps	2 x T8 LED
Voltage	120-277V
Max Wattage	22W Per Lamp
LISTINGS	UL (Damp Listed)

See Pages 88-93 for compatible T8 lamps

FlatMax™ MLFP G5 Series Enhanced Flat Panels



CCTs Selectable:



	1' x 4'		
MODEL NUMBER	MLFP14G515WCSCRTA		
ORDER CODE	111084		
Input Wattage	15W	20W	25W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2100	2800	3500
Efficacy (lm/W)	140 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	cETLus, Damp, DLC Premium, FCC		

Surface mount and flange kits available.
*Fixed CCT model.

FlatMax™ MLFP G5 Series Enhanced Flat Panels



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	MLFP22G515WCSCR			MLFP22G513CSCR
ORDER CODE	111085			111283
Input Wattage	15W	20W	25W	13W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2100 lm	2800 lm	3500 lm	1820 lm
Efficacy (lm/W)	140 lm/W	140 lm/W	140 lm/W	140 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available.
*Fixed CCT model.

FlatMax™ MLFP G5 Series Enhanced Flat Panels




CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	MLFP24G522WCSCR			MLFP24G520CSCR
ORDER CODE	111529			111284
Input Wattage	22W	30W	38W	20W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3080 lm	4200 lm	5320 lm	2800 lm
Efficacy (lm/W)	140 lm/W	140 lm/W	140 lm/W	140 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available.
*Fixed CCT model.

MLFPE Series Value Flat Panels

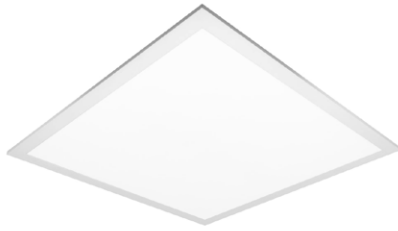

CCTs Selectable:



		2' x 2'		
MODEL NUMBER	MLFP22E18WCS MLFP22E18WCS/2PK			
ORDER CODE	110901 110716			
Input Wattage	18W	27W	36W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	1980 lm	2970 lm	3960 lm	
Efficacy (lm/W)	110 lm/w			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	cETLus, Damp, DLC, FCC			

Surface mount and flange kits available.

MLFPE Series Value Flat Panels



CCTs Selectable:



		2' x 4'		
MODEL NUMBER	MLFP24E27WCS MLFP24E27WCS/2PK			
ORDER CODE	110902 110717			
Input Wattage	27W	36W	45W	
Voltage	120-277V	120-277V	120-277V	
Delivered Lumens (lm)	2970 lm	3960 lm	4950 lm	
Efficacy (lm/W)	110 lm/w			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	cETLus, Damp, DLC, FCC			

Surface mount and flange kits available.

MLFPE Series - Direct/ Indirect Pendant Panels



CCTs Available:



		WHITE LENS	TRANSPARENT LENS
MODEL NUMBER		MLFP14DI3635I	MLFP14DI3640ICL
ORDER CODE		14098821	14098822
Input Wattage		36W	36W
Voltage		120-277V	
Delivered Lumens (lm)		4,396 lm	4,721 lm
Efficacy (lm/W)		112 lm/W	120 lm/W
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		3500K	4000K
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS		cETLus, Damp, FCC	

ArcMax™ MLVT G2 Series Enhanced Troffers



CCTs Selectable:



1.4'

MODEL NUMBER	MLVT14D13WCSER MLVT14D13WCSERTA		
ORDER CODE	110766 111484		
Input Wattage	13W	20W	26W
Voltage	120-277V		
Delivered Lumens (lm)	1950 lm	3000 lm	3900 lm
Efficacy (lm/W)	150 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, DLC, FCC		

ArcMax™ MLVT G2 Series Enhanced Troffers



CCTs Selectable:



2' x 2'

2' x 2'

MODEL NUMBER	MLVT22D13WCSER MLVT22D13WCSERTA			MLVT22D13CSER
ORDER CODE	110767 110988			110769
Input Wattage	13W	20W	26W	13W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	1950 lm	3000 lm	3900 lm	1950 lm
Efficacy (lm/W)	150 lm/W			150 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	UL, Damp, DLC, FCC			UL, Damp, DLC, FCC

ArcMax™ MLVT G2 Series Enhanced Troffers



CCTs Selectable:



2' x 4'

2' x 4'

MODEL NUMBER	MLVT24D22WCSER MLVT24D22WCSERTA			MLVT24D19CSER
ORDER CODE	110768 110992			110991
Input Wattage	22W	28W	34W	19W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	3300 lm	4200 lm	5100 lm	2850 lm
Efficacy (lm/W)	150 lm/W			1150 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	UL, Damp, DLC, FCC			UL, Damp, DLC, FCC



TV Series Value Troffers



CCTs Selectable:



	2' x 2'		
MODEL NUMBER	TV22D21WCS2P		
ORDER CODE	111015		
Input Wattage	21W	25W	30W
Voltage	120-277V		
Delivered Lumens (lm)	2625 lm	3125 lm	3750 lm
Efficacy (lm/W)	125 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, DLC Premium, FCC		

TV Series Value Troffers



CCTs Selectable:



	2' x 4'		
MODEL NUMBER	TV24D36WCS2P		
ORDER CODE	111016		
Input Wattage	36W	40W	45W
Voltage	120-277V		
Delivered Lumens (lm)	4500 lm	5000 lm	5625 lm
Efficacy (lm/W)	125 lm/W		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥50,000 hours		
LISTINGS	UL, Damp, DLC Premium, FCC		

Surface mount and flange kits available.

FPR Series - Enhanced Panel Retrofit Kit



CCTs Selectable:



	1' x 4'		
MODEL NUMBER	FPR14D15WCSCRTA FPR14D15WCSCR/2PKTA		
ORDER CODE	110998 110999		
Input Wattage	15W	20W	25W
Voltage	120-277V		
Delivered Lumens (lm)	2100 lm	2800 lm	3500 lm
Efficacy (lm/W)	lm/W	lm/W	lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	100,000 hours		
LISTINGS	cETLus, Damp, DLC Premium, FCC		

* Factory default CCT is 4000K. ** Factory default is lowest wattage at 4000K

FPR Series - Enhanced Panel Retrofit Kit



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	FPR22D15WCSCR FPR22D15WCSCR/2PKTA			FPR22D13CSCR
ORDER CODE	111002 111003			110512
Input Wattage	15W	20W	25W	13W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	2100 lm	2800 lm	3500 lm	1800 lm
Efficacy (lm/W)	140lm/W			140lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

* Factory default CCT is 4000K. ** Factory default is lowest wattage at 4000K

FPR Series - Enhanced Panel Retrofit Kit



CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	FPR24D22WCSCRTA FPR24D22WCSCR/2PKTA			FPR24D20CSCR
ORDER CODE	111006 ??????			111005
Input Wattage	22W	30W	38W	20W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	3080 lm	4200 lm	5320 lm	2800 lm
Efficacy (lm/W)	140 lm/W			140 lm/W
Color Rendering Index (CRI)	≥80			≥80
Color Temperature (CCT)	3500K/4000K/5000K			3500K/4000K/5000K
Dimming Compatible	0-10V			0-10V
Lumen Maintenance (L70)	100,000 hours			100,000 hours
LISTINGS	cETLus, Damp, DLC Premium, FCC			cETLus, Damp, DLC Premium, FCC

Surface mount and flange kits available.
* Factory default CCT is 4000K. ** Factory default is lowest wattage at 4000K

Patented
USB-C
Port and
Technology

Change sensors
without removing,
altering or
rewiring the fixture!



cMaxTM
LIGHTING CONTROLS



c-Max lighting controls can be installed at the start of your project or well after. Its patented design and wireless technology makes it **True Plug and Play!**



FAMILY OF PRODUCTS

cMaxTM BC
BASIC LIGHTING CONTROLS

cMaxTM NC
NETWORK LIGHTING CONTROLS

cMaxTM NP
NETWORK PARTNERS



c-MaxTM is a true plug-and-play platform that offers multi-tier control solutions. Experience the innovation of the integrated USB-C receptacles across a broad set of MaxLite's controls ready indoor and outdoor fixtures that makes it easy to add Luminaire Level Lighting Control (LLLC). Pair c-Max sensors/nodes with the correct CR fixtures and you are all set!

MaxLite[®]
A NEW WAVE OF LIGHT

Contact your MaxLite representative for details!

www.maxlite.com/cmax

TRK G2 Series - Enhanced Troffer Retrofit Kit



CCTs Selectable:



	1' x 4'		
MODEL NUMBER	TRK14D13WCSCR TRK14D13WCSCRTA		
ORDER CODE	110382 110974		
Input Wattage	13W	20W	26W
Voltage	120-277V, 50/60 Hz		
Delivered Lumens (lm)	2000, 2060, 2020	3040, 3140, 3080	3900, 4030, 3950
Efficacy (lm/W)	154, 159, 156	152, 157, 154	150, 155, 152
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	≥100,000 hours		
LISTINGS	UL, Damp, DLC, FCC		

* Fixtures are set to lowest wattage and 4000K as default factory setting

TRK G2 Series - Enhanced Troffer Retrofit Kit



CCTs Selectable:



	2' x 2'			2' x 2'
MODEL NUMBER	TRK22D13WCSCR TRK22D13WCSCRTA			TRK22D13CSCR
ORDER CODE	110383 110978			111199
Input Wattage	13W	20W	26W	13W
Voltage	120-277V, 50/60 Hz			120-277V, 50/60 Hz
Delivered Lumens (lm)	1970, 2010, 1980 lm	3020, 3080, 3040 lm	3900, 3970, 3920 lm	2000, 2010, 2000 lm
Efficacy (lm/W)	152, 155, 153 lm/W	151, 154, 152 lm/W	150, 153, 151 lm/W	150, 155, 152 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

* Fixtures are set to lowest wattage and 4000K as default factory setting

TRK G2 Series - Enhanced Troffer Retrofit Kit



CCTs Selectable:



	2' x 4'			2' x 4'
MODEL NUMBER	TRK24D22WCSCR TRK24D22WCSCRTA			TRK24D19CSCR
ORDER CODE	110384 110982			110798
Input Wattage	22W	28W	34W	19W
Voltage	120-277V			120-277V
Delivered Lumens (lm)	3380, 3490, 3430 lm	4250, 4390, 4310 lm	5100, 5270, 5160 lm	2850, 2940, 2880 lm
Efficacy (lm/W)	154, 159, 156 lm/W	152, 157, 154 lm/W	150, 155, 152 lm/W	150, 155, 152 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥100,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

* Fixtures are set to lowest wattage and 4000K as default factory setting



TRKE Series - Value Troffer Retrofit Kit



CCTs Selectable:



		2' x 2'		
MODEL NUMBER	TRKE22D20WCS2P			
ORDER CODE	111113			
Input Wattage	20W	25W	30W	
Voltage	120-277V			
Delivered Lumens (lm)	lm	lm	lm	
Efficacy (lm/W)	lm/W	lm/W	lm/W	
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

Surface mount and flange kits available.

TRKE Series - Value Troffer Retrofit Kit



CCTs Selectable:



		2' x 4'		
MODEL NUMBER	TRKE24D25WCS2P			
ORDER CODE	111114			
Input Wattage	25W	30W	36W	
Voltage	120-277V			
Delivered Lumens (lm)	lm	lm	lm	
Efficacy (lm/W)	lm/W	lm/W	lm/W	
Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K/4000K/5000K			
Dimming Compatible	0-10V			
Lumen Maintenance (L70)	≥50,000 hours			
LISTINGS	UL, Damp, DLC, FCC			

Surface mount and flange kits available.



MRBK Series - Value Magnetic Bar Retrofits Kits



2'



CCTs Available:

4000K

MODEL NUMBER	MRBK-21FL-40	MRBK-21FM-40	MRBK-21FH-40
ORDER CODE	106951	106955	106959
Input Wattage	9W	10W	12W
Voltage		120-277V	
Delivered Lumens (lm)	1125 lm	1330 lm	1575 lm
Efficacy (lm/W)		130 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		4000K	
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		≥50,000 hours	
LISTINGS	UL, Damp, DLC Premium, FCC		

MRBK Series - Value Magnetic Bar Retrofits Kits



4'



CCTs Available:

4000K

MODEL NUMBER	MRBK-41FL-40	MRBK-41FM-40	MRBK-41FH-40
ORDER CODE	107523	107527	107531
Input Wattage	9W	14W	18W
Voltage		120-277V	
Delivered Lumens (lm)	1625 lm	1921 lm	2275 lm
Efficacy (lm/W)		130 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		4000K	
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		≥50,000 hours	
LISTINGS	UL, Damp, DLC Premium, FCC		

RRCX Series - Enhanced Architectural Downlights



CCTs Selectable:



MODEL NUMBER	RRCX10WCSD	
ORDER CODE	105945	
Input Wattage	10/15/20W	
Voltage	120-277V	
Beam Angle	25°	45°
Delivered Lumens (lm)	1,046/1,476/1,944 lm	1,065/1,550/1,960 lm
Efficacy (lm/W)	105/98/99 lm/W	107/103/100 lm/W
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K	
Replacement	18W CFL	
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC	

RRCX Series - Enhanced Architectural Downlights



CCTs Selectable:



MODEL NUMBER	RRCX30WCSD		
ORDER CODE	105951		
Input Wattage	30W	40W	50W
Voltage	120-277V		
Beam Angle	40°		
Delivered Lumens (lm)	3,116 lm	3,936 lm	4,554 lm
Efficacy (lm/W)	103 lm/W	98 lm/W	91 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC		

*Contact MaxLite for lead times.

Select the Reflector



FAMILY	SIZE	SHAPE	REFLECTOR FINISH	FLANGE FINISH
RRC= Architectural Retrofit Commercial	4= 4" reflector	R= Round	M= Matte Silver W= White*	W= White
	6= 6" reflector			
	8= 8" reflector			
	10= 9.5" reflector			

These reflectors are only compatible with the light engines shown above
*Stocked in 8", Made to order in 4", 6" and 9.5"

Select an Optional New Construction Frame



FRAME PART #	DESCRIPTION
RCF-4	4" COMMERCIAL RECESSED FRAME
RCF-6	6" COMMERCIAL RECESSED FRAME
RCF-8	8" COMMERCIAL RECESSED FRAME
CDFK-4-10IN/2PK	COMMERCIAL DOWNLIGHT FRAME KIT

For new construction projects up to 8"

RCF Series - 4", 6" Value Triac Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF4T06WCS	RCF6T06WCS	RCF6T10WCS
ORDER CODE	111177	111178	110739
Input Wattage	6W/7W/8W	6W/7W/8W	10W/18W/23W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2700k	500/585/675	900/1620/2100
	3000K	500/585/675	900/1620/2100
	3500K	500/590/680	910/1650/2150
	4000K	500/600/700	910/1750/2300
	5000K	500/600/700	910/1750/2300
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 8", 10" Value Triac Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF8T05WCS	RCF8T18WCS	RCF10T28WCS
ORDER CODE	110740	110741	110742
Input Wattage	5W/8W/11W	18W/27W/34W	28W/35W/42W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2700k	450/750/1000	2700/3400/4100
	3000K	450/750/1000	2750/3450/4150
	3500K	450/760/1050	2800/3500/4200
	4000K	450/760/1100	2800/3500/4200
	5000K	450/760/1100	2800/3500/4200
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 4", 6" 0-10V Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF4V06WCS	RCF6V06WCS	RCF6V10WCS
ORDER CODE	111179	111180	110745
Input Wattage	6W/7W/8W	6W/7W/8W	10W/18W/23W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2700k	500/585/675	900/1620/2050
	3000K	500/585/675	900/1620/2100
	3500K	500/590/690	910/1650/2150
	4000K	500/590/700	910/1650/2300
	5000K	500/590/700	910/1650/2300
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF Series - 8", 10" Value 0-10V Dimming Commercial Downlights



CCTs Selectable:



MODEL NUMBER	RCF8V05WCS	RCF8V18WCS	RCF10V28WCS
ORDER CODE	110746	110747	110748
Input Wattage	5W/8W/11W	18W/27W/34W	28W/35W/42W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	2700k	450/750/1000	2700/3400/4100
	3000K	450/750/1000	2750/3450/4150
	3500K	450/760/1050	2800/3500/4200
	4000K	450/760/1100	2800/3500/4200
	5000K	450/760/1100	2800/3500/4200
Efficacy (lm/W)	≥90 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	See Compatible Dimmers List		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Wet, Energy Star, IC rated, FCC		

RCF - 8" Triac Dimming Commercial Downlights



CCTs Selectable:



	8"	
MODEL NUMBER	RCF813CSW-V2	RCF822CSW-V2
ORDER CODE	108834	108836
Input Wattage	13W	22W
Voltage	120-277V	
Delivered Lumens (lm)	1,115 lm	2,120 lm
Efficacy (lm/W)	87 lm/W	97 lm/W
Color Rendering Index (CRI)	≥80	
Color Temperature (CCT)	3000K/3500K/4000K	
Dimming Compatible	Triac	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	cETLus Listed and classified, Damp, Energy Star, IC rated, FCC	

Optional field installable battery back up and new construction recessed frame.

RCF - 4", 6" Triac Dimming Commercial Downlights



CCTs Selectable:



	4"		6"	
MODEL NUMBER	RCF412CSDW*		RCF610WCSW	
ORDER CODE	104776		104777	
Input Wattage	12W	10W	12W	17W
Voltage	120-347V	120-347V	120-347V	120-347V
Delivered Lumens (lm)	900 lm	1,000 lm	1,200 lm	1,700 lm
Efficacy (lm/W)	75 lm/W		100 lm/W	
Color Rendering Index (CRI)	80		80	
Color Temperature (CCT)	3000K/3500K/4000K		3000K/3500K/4000K	
Dimming Compatible	0-10V		0-10V	
Lumen Maintenance (L70)	50,000 hours		50,000 hours	
LISTINGS	FCC, cETLus, IC Rated, ENERGY STAR®		cETLus Listed and classified, Damp, Energy Star, IC rated, FCC	

Optional field installable battery back up and new construction recessed frame.
*CCT Selectable only.

RCF - 8" 0-10V Dimming Commercial Downlights



CCTs Selectable:



	8"		
MODEL NUMBER	RCF814WCSW		
ORDER CODE	104778		
Input Wattage	14W	17W	20W
Voltage	120-347V	120-347V	120-347V
Delivered Lumens (lm)	1,400 lm	1,700 lm	2,000 lm
Efficacy (lm/W)	100 lm/W		
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	3000K/3500K/4000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC		

Optional field installable battery back up and new construction recessed frame.



RCF - 10" 0-10V Dimming Commercial Downlights



9.5"



CCTs Selectable:



MODEL NUMBER	RCF1030WCSDW		
ORDER CODE	104779		
Input Wattage	30W	35W	40W
Voltage	120-347V	120-347V	120-347V
Delivered Lumens (lm)	2,550 lm	2,975 lm	3,400 lm
Efficacy (lm/W)	100 lm/W	100 lm/W	85 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	3000K/3500K/4000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC		

Optional field installable battery back up and new construction recessed frame.

RCF - 8" 0-10V Dimming Commercial Downlights



8"



CCTs Selectable:



MODEL NUMBER	RCF832WCSDW		
ORDER CODE	108389		
Input Wattage	32W	42W	52W
Voltage	120-347V	120-347V	120-347V
Delivered Lumens (lm)	3200 lm	4000 lm	5000 lm
Efficacy (lm/W)	100 lm/W	100 lm/W	95 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	3000K/3500K/4000K		
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	cETLus Listed and classified, Damp, Energy Star, FCC		

Litebars



	6"	12"	24"
MODEL NUMBER	LB0627	LB1227	LB2427
ORDER CODE	1409841	1409846	1409851
Input Wattage	2W	4W	8W
Voltage		120V	
Delivered Lumens (lm)	148 lm	341 lm	657 lm
Efficacy (lm/W)	70 lm/W	79 lm/W	84 lm/W
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		2700K, 3500K, 4000K, 5000K	
Dimming Compatible		Triac, ELV	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS		cULus, Damp, Energy Star, T20	

CCTs Available:



Litebars



	36"	48"	
MODEL NUMBER	LB3627	LB4827	
ORDER CODE	1409866	1409856	
Input Wattage	12W	16W	
Voltage		120V	
Delivered Lumens (lm)	987 lm	1,330 lm	
Efficacy (lm/W)	81 lm/W	83 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		2700K, 3500K, 4000K, 5000K	
Dimming Compatible		Triac, ELV	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS		cULus, Damp, Energy Star, T20	

CCTs Available:



Optional Accessories:



LB-BBC - 14098894
Bar-Bar Connector



LB-BBCF4 - 14098897
Bar-Bar Connector, Flexible 4"



LB-BBCF12 - 14098898
Bar-Bar Connector, Flexible 12"



LB-BBCF40 - 14098899
Bar-Bar Connector, Flexible 40"



LB-BBCR - 14098896
Bar-Bar Connector, 90 deg right



LB-BBCL - 14098895
Bar-Bar Connector, 90 deg left



LB-MB - 14098902
Mounting Bracket (2pcs per)



LB-PMB - 14098903
Pivot Mounting Bracket (2pcs per)



LB-MMB - 14098904
Magnetic Mounting Bracket (2pcs per)



LB-CBOX - 14098906
Connector Box




LB-DBOX - 14098905
Distribution Box



LB-HWC70 - 14098900
70" Hardwire Cord



LB-PC48 - 14098901
40" Plug Cord

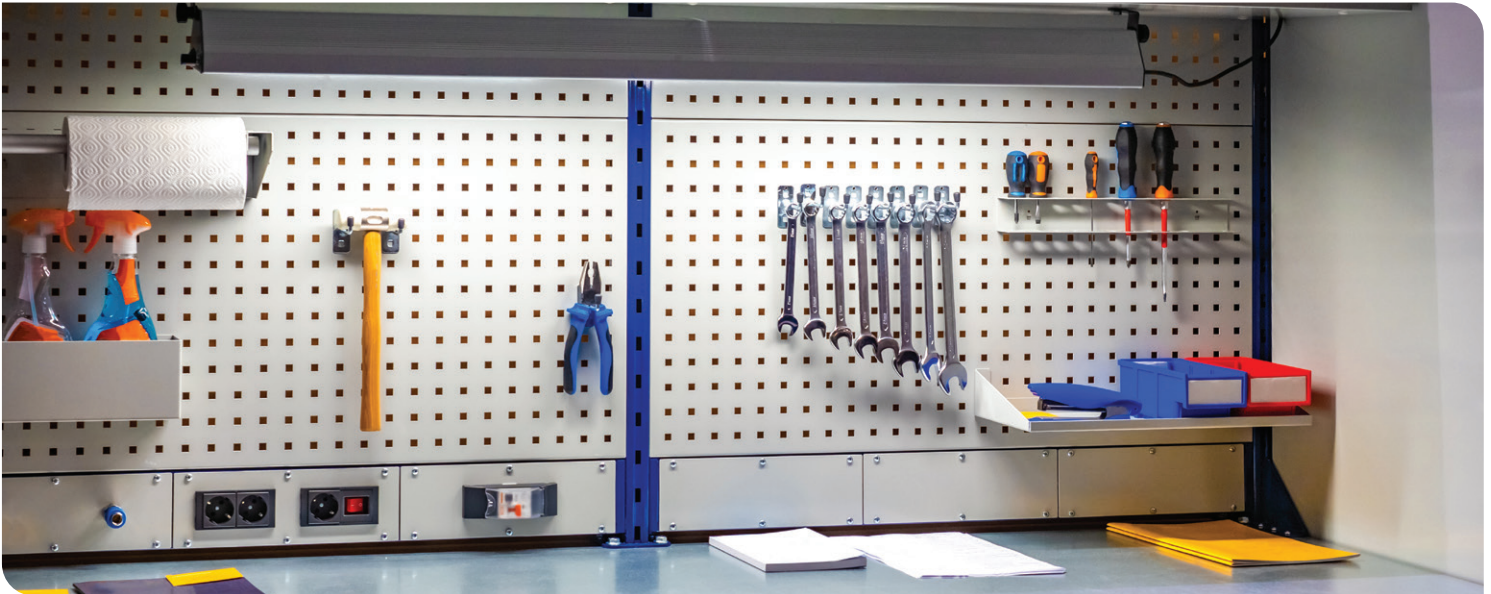

LED Shop Light Single Tube



4'



CCTs Available:



MODEL NUMBER	SL-48231-50
ORDER CODE	14101698
Input Wattage	23W
Voltage	120-277V
Delivered Lumens (lm)	2,400 lm
Efficacy (lm/W)	104 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5000K
Replacement	1x 32WT8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ETLus Listed, Dry, FCC

LED Shop Light Two Tubes



4'



CCTs Available:



MODEL NUMBER	SL2-48421-50
ORDER CODE	105973
Input Wattage	42W
Voltage	120-277V
Delivered Lumens (lm)	4,300 lm
Efficacy (lm/W)	102 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	5000K
Replacement	2 x 32W T8
Dimming Compatible	0-10V
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ETLus Listed, Dry, FCC

LED 120V Residential Retrofit Downlights w/Selectable CCT



CCTs Selectable:



	4"	5" 6"	5" 6"
MODEL NUMBER	RR4089CSW	RR6119CSW	RR6149CSW
ORDER CODE	104750	104751	104752
Input Wattage	8W	10.5W	14W
Voltage		120V	
Delivered Lumens (lm)	700 lm	900 lm	1,200 lm
Efficacy (lm/W)	88 lm/W	86 lm/W	86 lm/W
Color Rendering Index (CRI)		90	
Color Temperature (CCT)		2700K/3000K/3500K/4000K	
Replacement	40W INC	75W INC	100W INC
Dimming Compatible		Triac	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	ENERGY STAR®, Title 24, UL, FCC		

LED 120-277V Residential Retrofit Downlights w/Selectable CCT



CCTs Selectable:



	4"	6"
MODEL NUMBER	RR410UCSW	RR613UCSW
ORDER CODE	104664	104666
Input Wattage	10W	13W
Voltage	120-277V	120-277V
Delivered Lumens (lm)	650 lm	1,000 lm
Efficacy (lm/W)	65 lm/W	77 lm/W
Color Rendering Index (CRI)		90
Color Temperature (CCT)		2700K/3000K/3500K/4000K/5000K
Replacement	40W INC	75W INC
Dimming Compatible		Triac
Lumen Maintenance (L70)		54,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC, IC Rated	

LED Adjustable Residential Retrofit Downlights w/Selectable CCT



CCTs Selectable:



	4"	5" 6"
MODEL NUMBER	RRA4089CSW*	RRA6109CSW
ORDER CODE	105670	105652
Input Wattage	8W	10W
Voltage		120V
Delivered Lumens (lm)	700 lm	900 lm
Efficacy (lm/W)	87.5 lm/W	90 lm/W
Color Rendering Index (CRI)		90
Color Temperature (CCT)		2700K/3000K/3500K/4000K/5000K
Replacement	60W INC	75W INC
Dimming Compatible		Triac
Lumen Maintenance (L70)		50,000 hours
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC	

*4" is Special Order only

LED Round Slim Downlights w/Selectable CCT



CCTs Selectable:



	4"	6"	8"
MODEL NUMBER	SDLR413CSWJ	SDLR616CSWJ	SDLR820CSWJ
ORDER CODE	102887	102888	102889
Input Wattage	13W	16W	20W
Voltage		120V	
Delivered Lumens (lm)	796 lm	1,126 lm	1,520 lm
Efficacy (lm/W)	66 lm/W	71 lm/W	77 lm/W
Color Rendering Index (CRI)		>90	
Color Temperature (CCT)		2700K/3000K/4000K/5000K	
Dimming Compatible		Triac	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	FCC, ENERGY STAR®, ETL, T24 JA8		

LED Slim Downlight Baffle Style Round CCT Select



CCTs Selectable:



	SDBR4129CSW	SDBR6129CSW	SDBR8189CSW
MODEL NUMBER	SDBR4129CSW	SDBR6129CSW	SDBR8189CSW
ORDER CODE	105304	105361	105306
Input Wattage	12W	12W	18W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	800 lm	900 lm	1,500 lm
Efficacy (lm/W)	67 lm/W	75 lm/W	83 lm/W
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)		2700K/3000K/3500K/4000K/5000K (Default is 3000K)	
Dimming Compatible		Triac Dimming Range: 10%-100%	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	cETLus, FCC, Title 24 Compliant, JA8, IC Rated, Airtight®		

LED Disc Light w/Selectable CCT



CCTs Selectable:



	6"	7"
MODEL NUMBER	DL6079CSWH	DL7119CSWH
ORDER CODE	103864	103873
Input Wattage	7W	11W
Voltage	120V	120V
Delivered Lumens (lm)	650 lm	1,000 lm
Efficacy (lm/W)	97 lm/W	95 lm/W
Color Rendering Index (CRI)		90
Color Temperature (CCT)		2700K/3000K/4000K/5000K
Replacement	40W INC	75W INC
Dimming Compatible		Triac
Lumen Maintenance (L70)		50000
LISTINGS	ENERGY STAR®, JA8, Title 24, Title 20, cETLus, FCC	

Listed as a fixture and a retrofit. E26 screw-base connector included.

LED Architectural Vanity Bar w/Selectable CCT



CCTs Available:



24" (BRUSHED NICKEL FINISH)

MODEL NUMBER	ML8LA24ABN3OCS
ORDER CODE	106082
Input Wattage	30W
Voltage	120V
Delivered Lumens (lm)	2,700 lm
Efficacy (lm/W)	90 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K/3000K/4000K
Replacement	100W
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

LED Fleming Vanity Bar w/Selectable CCT



CCTs Available:



	24"	36"	48"
MODEL NUMBER	ML8LAFBN23827-	ML8LAFBN34827-	ML8LAFBN46827-
ORDER CODE	106229	106858	106859
Input Wattage	22W	34W	46W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,540 lm	2,380 lm	3,220 lm
Efficacy (lm/W)		70 lm/W	
Color Rendering Index (CRI)		≥80	
Color Temperature (CCT)		2700K/3000K/4000K	
Dimming Compatible		Triac	
Lumen Maintenance (L70)	50,000 hours	50,000 hours	50,000 hours
LISTINGS		ENERGY STAR®, cETLus, FCC	

LED Tulip Vanity Bar



CCTs Available:



	24"
MODEL NUMBER	ML8LATUN30930
ORDER CODE	102822
Input Wattage	30W
Voltage	120V
Delivered Lumens (lm)	2,315 lm
Efficacy (lm/W)	85 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	3000K
Replacement	3 x 60W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	25,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

LED Flush Mounts - Traditional Series



CCTs Available:

3000K

15" (WHITE FINISH)	
MODEL NUMBER	ML2LALTRWH24830
ORDER CODE	1409609
Input Wattage	24W
Voltage	120V
Delivered Lumens (lm)	1,680 lm
Efficacy (lm/W)	68 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000K
Replacement	100W INC
Dimming Compatible	Triac
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, ETL, FCC

LED Flush Mounts - Architectural Series w/Selectable CCT



CCTs Available:



	12" (BRUSHED NICKEL FINISH)	14" (BRUSHED NICKEL FINISH)	16" (BRUSHED NICKEL FINISH)
MODEL NUMBER	ML2LASABN169CS	ML2LAMABN209CS	ML2LALABN249CS
ORDER CODE	103943	103944	103945
Input Wattage	16W	20W	25W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,000 lm	1,400 lm	1,600 lm
Efficacy (lm/W)	62.5 lm/W	70 lm/W	64 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	75W INC	100W INC	150W INC
Dimming Compatible	Triac		
Lumen Maintenance (L70)	54,000 hours		
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC		

LED Flush Mounts - Architectural Series w/Selectable CCT



CCTs Available:



	12" (BRUSHED NICKEL FINISH)	14" (BRUSHED NICKEL FINISH)	16" (BRUSHED NICKEL FINISH)
MODEL NUMBER	ML2LASABNU169CS	ML2LAMABNU209CS	ML2LALABNU249CS
ORDER CODE	103946	103947	103949
Input Wattage	16W	20W	24W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,200 lm	1,500 lm	1,900 lm
Efficacy (lm/W)	75 lm/W	75 lm/W	79 lm/W
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	100W INC	125W INC	150W INC
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	54,000 hours		
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC		

Field programmable bi-level motion sensor and Battery back up optional.

LED Flush Mounts - Puff Series w/Selectable CCT



CCTs Available:



	11" (WHITE)	13" (WHITE)	15" (WHITE)
MODEL NUMBER	ML2LASPWH169CS	ML2LAMPWH209CS	ML2LALPWH249CS
ORDER CODE	103950	104651	104652
Input Wattage	16W	20W	25W
Voltage	120V	120V	120V
Delivered Lumens (lm)	1,100 lm	1,400 lm	1,700 lm
Efficacy (lm/W)	69 lm/W	70 lm/W	68 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	75W INC	100W INC	150W INC
Dimming Compatible	Triac		
Lumen Maintenance (L70)	54,000 hours		
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC		

LED Flush Mounts - Puff Series w/Selectable CCT



CCTs Available:



	11" (WHITE)	13" (WHITE)	15" (WHITE)
MODEL NUMBER	ML2LASPWHU169CS	ML2LAMPWHU209CS	ML2LALPWHU249CS
ORDER CODE	103953	103954	103955
Input Wattage	16W	20W	24W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	1,300 lm	1,500 lm	2,000 lm
Efficacy (lm/W)	81 lm/W	80 lm/W	83 lm/W
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K		
Replacement	100W INC	125W INC	150W INC
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	54,000 hours		
LISTINGS	ENERGY STAR®, Title 24, cETLus, FCC		

Field programmable bi-level motion sensor and Battery back up optional.

LED Flush Mounts - Fleming Series w/Selectable CCT



Built-in Motion Sensor

CCTs Available:



	5" (WHITE FINISH)	7" (WHITE FINISH)	12" (WHITE FINISH)	12" (WHITE FINISH)
MODEL NUMBER	ML2LA05SWH129CS2MS	ML2LA07SWH139CS2MS	ML2LA12SWH189CS2MS	ML2LA12SWH239CS2MS
ORDER CODE	109235	109236	109237	109238
Input Wattage	12W	12.5W	18W	23W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	735 lm	1,090 lm	1,520 lm	1,950 lm
Efficacy (lm/W)	61.25 lm/W	87 lm/W	84.5 lm/W	85 lm/W
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K			
Replacement	60W INC	75W INC	125W INC	150W INC
Dimming Compatible	Triac			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	cETLus, FCC			

Listed as a fixture and a retrofit. Bi-level motion sensor, E26 base and friction clips (5") or torsion springs (7",12") included.

Bulb in Box: Architectural Torchiere



Finishes Available:



WHITE FINISH	
MODEL NUMBER	ML1E242DARWH27-V2
ORDER CODE	1410155
Number of Lamps	2 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	2,200 lm
Color Rendering Index (CRI)	≥90
Max Wattage	24W
LISTINGS	JA8 Bulb, ENERGY STAR®, ETL, FCC

Bulb in Box: Ranch Outdoor Lantern



CCTs Available:



W/ PHOTOCELL AND PHOTOCELL COVER CAP	
MODEL NUMBER	ML4LE109SPLBK2
ORDER CODE	101309
Number of Lamps	1 x 9W 2700K E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	800 lm
Housing	Die Casting
Lens	Frosted Glass
Max Wattage	9W
LISTINGS	ENERGY STAR®, cETLus, FCC

Bulb in Box: Pagoda Outdoor Lantern



CCTs Available:



W/ PHOTOCELL AND PHOTOCELL COVER CAP	
MODEL NUMBER	ML4E121PLBK27
ORDER CODE	101077
Number of Lamps	1 x 12W 2700K JA8 COMPLIANT E26 SOCKET LED LAMP
Voltage	120V
Source Lumens (lm)	1,100 lm
Housing	Die Casting
Lens	Plastic
Max Wattage	12W
LISTINGS	ENERGY STAR®, UL, FCC, JA8

LED Coach Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS10MCLBK827
ORDER CODE	97868
Input Wattage	10W
Voltage	120V
Delivered Lumens (lm)	500 lm
Efficacy (lm/W)	50 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	25W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, UL, FCC

LED Ranch Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS12SRLBK827
ORDER CODE	96974
Input Wattage	12W
Voltage	120V
Delivered Lumens (lm)	750 lm
Efficacy (lm/W)	62.5 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	60W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	UL, FCC, ENERGY STAR®

LED Mission Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LASMSB14827PC
ORDER CODE	1408707
Input Wattage	14W
Voltage	120V
Delivered Lumens (lm)	815 lm
Efficacy (lm/W)	58 lm/W
Color Rendering Index (CRI)	>80
Color Temperature (CCT)	2700K
Replacement	60W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ETL, FCC, ENERGY STAR®

LED Traditional Lantern



CCTs Available:

2700K

W/ PHOTOCELL AND PHOTOCELL COVER CAP

MODEL NUMBER	ML4LS14SOLBPC
ORDER CODE	101444
Input Wattage	13.5W
Voltage	120V
Delivered Lumens (lm)	1,165 lm
Efficacy (lm/W)	86 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K
Replacement	100W INC
Lumen Maintenance (L70)	50,000 hours
LISTINGS	ENERGY STAR®, cETLus, FCC

PurAirMax Tabletop Air Purifier



MODEL NUMBER	AP215SF2
ORDER CODE	110330
Input Wattage	9W
Voltage	120V AC, 60Hz
Rated Power	High Speed: 45W, Middle Speed: 29W, Low Speed: 19W, Sleep Mode: 14W
Rotate Speed	High Speed: 2200 rpm, Middle Speed: 1500 rpm, Low Speed: 1150 rpm, Sleep Mode: 950 rpm
Noise Level	Max. 60 dBA
Timer Function	8 hours
Filter Life	1500 hours
Net Weight	8.2 lbs
LISTINGS	ETLus Listed, ES, FCC

LED Garage Light 4 Panel



CCTs Available:

5000K

MODEL NUMBER	GL-054UB50
ORDER CODE	109540
Nominal Wattage	54W
Voltage	120V
Delivered Lumens (lm)	5,400 lm
Efficacy (lm/W)	≥100 lm/W
Color Rendering Index (CRI)	83
Color Temperature (CCT)	5000K
Operating Temperature	-4 - 104°F (-20-40°C)
Power Factor	≥0.9
Lumen Maintenance (L70)	20,000 hours
LISTINGS	ETLus Listed, Damp, FCC

Smart Wall Plug, Plug Strip



WP-SMTR



APS-6/USB/SMTR

MODEL NUMBER	WP-SMTR	APS-6/USB/SMTR
ORDER CODE	110369	110370

M Series™ - Area Fixtures



MODEL NUMBER	M40U3M-CSBACR	M55U3M-CSBACR	M75U3M-CSBACR	M100U3M-CSBACR
ORDER CODE	106188	106192	106196	106201
Input Wattage	40W	55W	75W	100W
Voltage	120-277V (277-480V available as option)			
Delivered Lumens (lm)	5,260 lm	7,170 lm	9,860 lm	12,670 lm
Efficacy (lm/W)	131.5 lm/W	130 lm/W	131.5 lm/W	127 lm/W
Color Rendering Index (CRI)	>70 (>80 option available)			
Color Temperature (CCT)	3000/4000/5000K			
Replacement	125W MH	150W MH	200W MH	250W MH
Controls	Field installable c-Max (7pin twist lock receptacle and third party controls also available)			
Lumen Maintenance (L70)	> 150,000 hrs			
Mounting	Straight Arm (also available - Flexible Arm and Adjustable Slip Fitter)			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

CCTs Available:



6 Area/Roadway distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Back Light Shield, Visors and Visual Comfort Lens accessories also available.

M Series™ - Area Fixtures



MODEL NUMBER	M125U3M-CSBACR	M150U3M-CSBACR	M200U3M-CSBACR	M250U3M-CSBACR	M320U3M-CSBACR
ORDER CODE	106208	106215	106222	106227	106232
Input Wattage	125W	150W	200W	250W	320W
Voltage	120-277V (277-480V available as option)				
Delivered Lumens (lm)	18,800 lm	21,200 lm	29,220 lm	36,690 lm	46,290 lm
Efficacy (lm/W)	150 lm/W	141 lm/W	146 lm/W	147 lm/W	144.5 lm/W
Color Rendering Index (CRI)	>70 (>80 option available)				
Color Temperature (CCT)	3000K/4000K/5000K				
Replacement	320/350W MH	400W MH	750W MH	750/1000W MH	1,000 MH
Controls	Field installable c-Max (twist lock receptacle option available)				
Lumen Maintenance (L70)	> 150,000 hrs				
Mounting	Straight Arm (also available - Flexible Arm and Adjustable Slip Fitter)				
LISTINGS	UL, DLC Premium, ANSI 3G rated				

CCTs Available:



6 Area/Roadway distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Back Light Shield, Visors and Visual Comfort Lens accessories also available.

AE Area Fixtures



MODEL NUMBER	AE80UT3-WCSBFRCR	AE100UT3-WCSBFRCR	AE150UT3-WCSBFRCR
ORDER CODE	109633	109635	109637
Input Wattage	80W	100W	150W
Voltage	120-277V		
Delivered Lumens (lm)	10,000+ lm	12,500+ lm	18,750+ lm
Efficacy (lm/W)	120+ lm/W		
Color Rendering Index (CRI)	>70		
Color Temperature (CCT)	3000K/4000K/5000K		
Beam Type	Type III		
Replacement	200W MH	250W MH	400W MH
Controls	Field Installable c-Max (twist lock receptacle also available)		
Lumen Maintenance (L70)	> 100,000 hrs		
Mounting	Flexible (adjustable) Arm		
LISTINGS	UL, IP65, 3G, FCC		

CCTs Available:



Options - Type IV & V distributions, Slip Fitter mount, 277-480V and twist lock receptacle. Backlight shield accessory also available. Please check website and literature for Changeable Optics coming soon!

AE Area Fixtures



CCTs Available:



450W dedicated CCT



MODEL NUMBER	AE200UT3-CSBFCR	AE300UT3-WCSBFCR	AE450UT3-W50BFCR
ORDER CODE	109688	109641	109643
Input Wattage	200W	300W	450W
Voltage	120-277V		
Delivered Lumens (lm)	25,000+ lm	37,500+ lm	56,000+ lm
Efficacy (lm/W)	120+ lm/W		
Color Rendering Index (CRI)	>70		
Color Temperature (CCT)	3000K/4000K/5000K		5000K
Beam Type	Type III		
Replacement	750W MH	1,000W MH	1,200W MH
Controls	Field Installable c-Max (twist lock receptacle also available)		
Lumen Maintenance (L70)	> 100,000 hrs		
Mounting	Flexible (adjustable) Arm		
LISTINGS	UL, IP65, 3G, FCC		

Options - Type IV & V distributions, Slip Fitter mount, 277-480V and twist lock receptacle. Backlight shield accessory also available. Please check website and literature for Changeable Optics coming soon!

Barn Lights



CCTs Available:



MODEL NUMBER	DBL40UT5-CSGPN	DBL60UT5-WCSGPN
ORDER CODE	104048	108567
Input Wattage	40W	36/48/60W
Voltage	120-277V (277-480V available)	
Delivered Lumens (lm)	5,300 lm	4,600/6,200/7,800 lm
Efficacy (lm/W)	120-130 lm/W	
Color Rendering Index (CRI)	>80	
Color Temperature (CCT)	3000/4000/5000K	
Replacement	150W MH	175W MH
Controls	c-Max PC included, c-Max Control Compatible*	
Lumen Maintenance (L70)	>100,000 hours	
Mounting	24" curved arm included, neck accommodates 1 5/8"-2 3/8" OD brackets	
LISTINGS	UL, DLC Premium	

*Contact Maxlite about c-Max Network control capabilities

Post Top Spider Mount



CCTs Available:



MODEL NUMBER	PSM53UT5-50B	PSM78UT5-50B	PSM143UT5-50B
ORDER CODE	108715	108718	108713
Input Wattage	53W	78W	143W
Voltage	120-277V		
Delivered Lumens (lm)	6900lm	9,700lm	15,700lm
Efficacy (lm/W)	129 lm/W	124 lm/W	110 lm/W
Color Rendering Index (CRI)	>70		
Color Temperature (CCT)	5000K		
Distribution	Type 5		
Replacement	150W MH	250W MH	400W MH
Controls	Twist Lock Photocell or Motion Sensor Options		
Lumen Maintenance (L70)	>50,000 hours		
Mounting	2 3/8" OD slipfitter		
LISTINGS	UL, FCC, DLC, DLC Premium, 3G		

Enhanced Canopy/Parking Luminaires



CCTs Available:



MODEL NUMBER	CPL20UCSBCR	CPL30UCSBCR	CPL40UCSBCR	CPL60UWCSWCR
ORDER CODE	109421	109422	109423	109449
Input Wattage	20W	30W	40W	38/48/58W
Voltage	120-277V			
Delivered Lumens (lm)	2,500 lm	3,750 lm	5,000 lm	4,750 - 7,250 lm
Efficacy (lm/W)	120+lm/W			
Color Rendering Index (CRI)	≥70			
Color Temperature (CCT)	3000K/4000K/5000K			
Distribution	Single lens meets Canopy/Parking/Stairwell and Low Bay categories			
Replacement	100 MH	150 MH	175 MH	250 MH
Controls	Field Installable c-Max			
Lumen Maintenance (L70)	>100,000 hours			
Mounting	Single screw hinge design for quick access to internal conduit holes for surface conduit installation			
LISTINGS	UL, FCC			

277-480V, third party control and different finish options available. Comfort Lens and Beauty Plate accessories also available.

Value Canopy/Parking Luminaires



CCTs Available:



MODEL NUMBER	CP20UP-50B	CP30UP-50B	CP45UP-50B
ORDER CODE	110641	110643	110645
Input Wattage	20W	30W	45W
Voltage	120-277V		
Delivered Lumens (lm)	3,000 lm	4,800 lm	6,400 lm
Efficacy (lm/W)	150 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	Dedicated 4000K or 5000K		
Replacement	70W MH	100W MH	150W MH
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	>50,000 hours		
LISTINGS	Ulus, FCC, RoHS		

Motion Sensor, Photocell, Canopy Optics, different finishes and battery backup accessory available

Value Canopy/Parking Luminaires



CCTs Available:



CCTs Selectable:

70/100W

MODEL NUMBER	CP55UP-50B	CP70UC-CSB	CP100UC-WCSB
ORDER CODE	110647	110693	110694
Input Wattage	55W	70W	100W
Voltage	120-277V		
Delivered Lumens (lm)	6900 lm	9,560-10,200 lm	12,680-13,490 lm
Efficacy (lm/W)	150 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥70		
Color Temperature (CCT)	Dedicated 4000K or 5000K	3000K/4000K/5000K	
Replacement	175W MH	200W MH	250W MH
Dimming Compatible	0-10V		
Lumen Maintenance (L70)	>50,000 hours		
LISTINGS	Ulus, FCC, RoHS		

Motion Sensor, Photocell, Canopy Optics, different finishes and battery backup accessory available



PathMax™ Classic Bollards Series



CCTs Available:



	36"	42"	36"	42"
MODEL NUMBER	BL-CLRF38U-40B36	BL-CLRF17U-40B	BL-CLRD38U-40B36	BL-CLRD17U-40BLR
ORDER CODE	14101675	14100775	14101671	14100980
Head	Flat		Dome	
Input Wattage	38W	17W	38W	17W
Voltage	120-277V	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,610 lm	1,458 lm	3,610 lm	733 lm
Efficacy (lm/W)	95 lm/W	86 lm/W	95 lm/W	43 lm/W
Color Rendering Index (CRI)	>80	>80	>80	>80
Distribution	Wide Beam	Wide Beam	Wide Beam	Louver
Color Temperature (CCT)	3000K, 4000K, 5000K			
Replacement	150W MH	70W MH	150W MH	70W MH
Dimming Compatible	N/A	0-10V	N/A	0-10V
Lumen Maintenance (L70)	>50,000 hours	>100,000 hours	>50,000 hours	>50,000 hours
LISTINGS	UL, IP65	CSA Group Listed, IP65, BAA	UL, IP65	CSA Group listed, IP65, BAA

Options available in different finishes, distributions, with louvers and customer heights; GFCI receptacle and glare shield accessories available.

PathMax™ Slim Bollards



CCTs Available:



	42"	42"	42"
MODEL NUMBER	BL-CLRD22UCSLRB	BL-CLRF22UCSB	BL-CLSF22UCSB
ORDER CODE	106012	106003	106486
Shape	Dome, Round, Louvered, 42"	Flat, Round, 42"	Flat, Square, 42"
Input Wattage	22W		
Voltage	120-277V		
Delivered Lumens (lm)	2,860 (Louvered 1,320) lm		
Efficacy (lm/W)	130 (Louvered 60) lm/W		
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	70W MH		
Controls	Field Installable c-Max available using CR option		
Lumen Maintenance (L70)	>50,000 hours		
LISTINGS	UL, IP65, DLC Premium		

Options - Louvers and 36" height.

M Series™ - Floods



MODEL NUMBER	M40UW-CSBTCTR	M55UW-CSBTCTR	M75UW-CSBTCTR	M100UW-CSBTCTR
ORDER CODE	106190	106194	106199	106206
Input Wattage	40W	55W	75W	100W
Voltage	120-277V (277-480V available as option)			
Delivered Lumens (lm)	5,260 lm	7,170 lm	9,860 lm	12,670 lm
Efficacy (lm/W)	131.5 lm/W	130 lm/W	131.5 lm/W	127 lm/W
Color Rendering Index (CRI)	>70 (>80 option available)			
Color Temperature (CCT)	3000K/4000K/5000K			
Replacement	125W MH	150W MH	200W MH	250W MH
Controls	Field installable c-Max (twist lock receptacle option available)			
Lumen Maintenance (L70)	> 150,000 hrs			
Mounting	Trunnion (Adjustable Slip Fitter also available)			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

CCTs Available:



3 Beam Spreads available 6x7 (5S), 6x6 (W), 4x4 (N, Narrow), Visors and Visual Comfort Lens accessories also available.

M Series™ - Floods



MODEL NUMBER	M125UW-CSBTCTR	M150UW-CSBTCTR	M200UW-CSBTCTR	M250UW-CSBTCTR	M320UW-CSBTCTR
ORDER CODE	106213	106220	106225	106230	106236
Input Wattage	125W	150W	200W	250W	320W
Voltage	120-277V (277-480V available as option)				
Delivered Lumens (lm)	18,800 lm	21,200 lm	29,220 lm	36,690 lm	46,290 lm
Efficacy (lm/W)	150 lm/W	141 lm/W	146 lm/W	147 lm/W	144.5 lm/W
Color Rendering Index (CRI)	>70 (>80 option available)				
Color Temperature (CCT)	3000K/4000K/5000K				
Replacement	320/350W MH	400W MH	750W MH	750/1000W MH	1,000 MH
Controls	Field installable c-Max (twist lock receptacle option available)				
Lumen Maintenance (L70)	> 150,000 hrs				
Mounting	Trunnion (Adjustable Slip Fitter also available)				
LISTINGS	UL, DLC Premium, ANSI 3G rated				

CCTs Available:



3 Beam Spreads available 6x7 (5S), 6x6 (W), 4x4 (N, Narrow), Visors and Visual Comfort Lens accessories also available.

FieldMax™ Sports/ High Output Floods



MODEL NUMBER	SHF515U-50WLY	SHF620U-50NLY	SHF1200H-50NLY
ORDER CODE	109398	109572	109400
Input Wattage	515W	620W	1,200W
Voltage	120-277V	120-277V	220-480V
Delivered Lumens (lm)	72,400 - 77,350 lm	92,200 - 100,200 lm	158,400 - 172,050 lm
Efficacy (lm/W)	130+ lm/W		
Color Rendering Index (CRI)	70+		
Color Temperature (CCT)	4000K, 5000K		
Beam Type	Wide, 7x6	Narrow, 4x4	Narrow, 4x4
Replacement	1,000 MH	1,500 MH	2,000 MH
Dimming Compatible	Multiple controls options available including dimming, remote control and dynamic lighting effects		
Lumen Maintenance (L70)	100,000+ hours		
Mounting	Yoke		
LISTINGS	DLC Premium, UL, IP65, 3G, FCC		

CCTs Available:



Multiple beam spreads (Narrow - Wide), Slip Fitter mount, 120-277V or 220-480V options and visor accessories available. Full controls packages including dynamic lighting effects also available.

FloodMax™ LED Flood Lights



CCTs Available:




120V-277V button photocell included with removable cap, Narrow optics and visors available. Multiple mounting options available.

MODEL NUMBER	FMS30UW-50BKTPC	FMM80UW-40BKTPC	FML120UW-40BTSRPC
ORDER CODE	14100146	14100149	14100149
Input Wattage	29W	53W	110W
Voltage	120-277V	120-277V	120-277V
Delivered Lumens (lm)	3,900 lm	9,900 lm	14,300 lm
Efficacy (lm/W)	130 lm/W	132 lm/W	130 lm/W
Color Rendering Index (CRI)		>70	
Beam Spread	Wide (7x7)	Wide (6x6)	Wide (6x6)
Color Temperature (CCT)	5000K	4000K	4000K
Replacement	100W MH	250W MH	400W MH
Dimming Compatible		0-10V	
Lumen Maintenance (L70)		100,000 hours	
Mounting	Knuckle 1/2" Thread	Knuckle 1/2" Thread	Trunnion
LISTINGS	UL, IP65, DLC Premium		

Slim Flood Lights



CCTs Available:



Consult literature for CCT availability 15-50W

MODEL NUMBER	MSF15UW-50BKT	MSF29UW-50BKT	MSF50UW-50BKT	MSF70UW-CSBYRPC	MSF90UW-CSBSKRPC
ORDER CODE	104186	104190	104193	104196	104197
Input Wattage	15W	29W	50W	70W	90W
Voltage			120-277V		
Delivered Lumens (lm)	1,600 lm	3,400 lm	6,000 lm	9,000 lm	13,000 lm
Efficacy (lm/W)	114 lm/W	115 lm/W	118 lm/W	120 lm/W	125 lm/W
Color Rendering Index (CRI)	≥83	≥84	≥83	≥82	≥82
Color Temperature (CCT)	5000K	5000K	5000K	3000/4000/5000K	3000/4000/5000K
Beam Spread			Wide		
Replacement	70W MH	100W MH	150W MH	175W MH	250W MH
Lumen Maintenance (L70)			>100,000 hrs		
Mounting	1/2" Threaded Knuckle	1/2" Threaded Knuckle	1/2" Threaded Knuckle	Yoke	Slip Fitter
LISTINGS	UL, 1.5G, FCC				

70/90W CCT Selectable (3/4/5K) and include 3pin twist lock receptacle with shorting cap. Narrow lens available in 50W, Yoke and Slipfitter mounts available.

Slim Flood Lights CCT & Wattage Selectable



CCTs Available:



MODEL NUMBER	MSF15UW-CSBKTYPC	MSF25UW-WCSBKTYPC	MSF60UW-WCSBKTYPC	MSF105UW-CSBYPC	MSF140UW-WCSBKPC
ORDER CODE	108575	108576	108582	108583	108586
Input Wattage	15W	15/20/25W	20/40/60W	85/95/105W	100/120/140W
Voltage			120-277V		
Delivered Lumens (lm)	1,850-2,090 lm	3,600 lm	8,400 lm	14,700 lm	19,600 lm
Efficacy (lm/W)			120-140 (lm/W)		
Color Rendering Index (CRI)			>70		
Color Temperature (CCT)			3000K/4000K/5000K		
Replacement	70W MH	100W MH	175W MH	250W MH	400W MH
Controls			Photocell with on/off switch included		
Lumen Maintenance (L70)			>100,000 hours		
Mounting	Both 1.2" Threaded Knuckle and Yoke included			Choice between Slip Fitter or Yoke	
LISTINGS	UL, DLC Premium				

Check literature for adjustable beam spread (Narrow/Medium/Wide) coming soon!

Slim Flood Lights CCT & Wattage Selectable



CCTs Available:



MODEL NUMBER	MSF200EUW-WCSBYCBPR7	MSF300EUW-WCSBKCBPR7	MSF300EHW-WCSBKCBPR7
ORDER CODE	108587	108597	110933
Input Wattage	150/180/200W	260/280/300W	260/280/300W
Voltage	1120-277V, 277-480V available, 50/60Hz		
Delivered Lumens (lm)	21,300-30,000 lm		
Efficacy (lm/W)	142-150/142-150/140-150 (lmW)	132-141/132-141/130-139 (lmW)	132-140/132-140/130-138 (lmW)
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	200 = 750W, 300 = 1000W		
Controls	7 pin twist lock receptacle with shorting cap and control base receptacle for motion sensor/PC control accessory (sold separate) standard		
Lumen Maintenance (L70)	>100,000 hours		
Mounting	Choice between Slip Fitter or Yoke		
LISTINGS	ULus, FCC		

Check literature for adjustable beam spread (Narrow/Medium/Wide) coming soon!

Bullet Flood Lights



CCTs Available:



MODEL NUMBER	BF25UW-WCSBPCTA	BF25UW-WCSWPCTA	
ORDER CODE	111125	111127	
Input Wattage	9W	16W	25W
Delivered Lumens (lm)	1,180 - 1,300 lm	2,090-2,320 lm	3,060-3,320 lm
Efficacy (lm/W)	131-145lm/w		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3000K/4000K/5000K		
Beam Angle	Medium (5x5, 45°) & Wide (7x7, 107°) in carton, Narrow (4x4 26°) sold as an accessory		
Lumen Maintenance (L70)	>100,000 hrs		
Mounting	Adjustable Knuckle with ½" threaded Nipple		
LISTINGS	ULus, FCC		

Narrow lens and shroud available as field installable accessories. Slip Fitter, ground stake and flat surface mount accessories also available. Available in White.

Steel 4" Straight Square Poles



MODEL NUMBER	PL-SQ4-15T11-BQ	PL-SQ4-20T11-BQ	PL-SQ4-25T11-BQ
ORDER CODE	14100934	14100935	14100936
Height	15'	20'	25'
Shaft Size	4" Square		
Gauge	11		
Finish	Bronze		
Mounting	2.375" O.D.x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon	2.375" O.D. x 4" Tall Tenon

Available with MaxLite drilled pattern (fits MP-AR, AR, and GMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Steel 5" Straight Square Poles



MODEL NUMBER	PL-SQ5-25T11-BQ	PL-SQ5-30T11-BQ	PL-SQ5-30T07-BQ
ORDER CODE	14100937	14100938	14100939
Height	25'	30'	30'
Shaft Size	5" Square		
Gauge	11	11	7
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Aluminum 4" Straight Square Poles



MODEL NUMBER	PL-SA4-12T1-B	PL-SA4-15T1-B	PL-SA4-16T3-B	PL-SA4-20T3-B
ORDER CODE	14102083	14102085	14102087	14102089
Height	12'	15'	16'	20'
Shaft Size	4" Square			
Wall Thickness	0.125"	0.125"	0.188"	0.188"
Finish	Bronze			
Mounting	2.375" O.D.x 4" Tall Tenon			

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Square Poles



MODEL NUMBER	PL-SA5-20T3-B	PL-SA5-25T3-B
ORDER CODE	14102091	14102093
Height	20'	25'
Shaft Size	5" Square	
Wall Thickness	0.188"	
Finish	Bronze	
Mounting	2.375" O.D. x 4" Tall Tenon	

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Steel 3" Straight Round Poles



MODEL NUMBER	PL-RS3-08T11-B	PL-RS3-10T11-B	PL-RS3-12T11-B
ORDER CODE	14101881	14101885	14101889
Height	8'	10'	12'
Shaft Size	3" Round		
Gauge	11		
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details.

Steel 4" Straight Round Poles



MODEL NUMBER	PL-RS4-15T11-B	PL-RS4-20T11-B
ORDER CODE	14101860	14101864
Height	15'	20'
Shaft Size	4" Round	
Gauge	11	
Finish	Bronze	
Mounting	2.375" O.D. x 4" Tall Tenon	

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Steel 5" Straight Round Poles



MODEL NUMBER	PL-RS5-25T11-B	PL-RS5-30T11-B	PL-RS5-30T07-B
ORDER CODE	14101869	14101877	14101875
Height	25'	30'	30'
Shaft Size	5" Round		
Gauge	11	11	7
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		

Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 2-4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Aluminum 5" Straight Round Poles




MODEL NUMBER	PL-RA5-12T3-B	PL-RA5-16T3-B	PL-RA5-20T3-B
ORDER CODE	14102076	14102078	14102080
Height	12'	16'	20'
Shaft Size	5" Round		
Wall Thickness	0.188"		
Finish	Bronze		
Mounting	2.375" O.D. x 4" Tall Tenon		


Available with MaxLite drilled pattern (fits MP-AR, AR, and QMP series) or additional tenon tops; different finishes, and custom heights. Manufacturing lead times are 4 weeks based on model number and quantity. Please refer to datasheet for loading details. *BAA - Contact MaxLite for lead times.

Mounting Accessories


BULLHORN - 2.375" wide x 4" tall Tenon Top




PL-BB218-B




PL-BB318L-B




PL-BB318-B



PL-BB312-B




PL-BB490-B




PL-BB418-B

SPOKE BRACKETS - 2.375" wide x 4" tall Tenon Top




PL-SB190-B



PL-SB218-B



R4HT290BZ



PL-SB390-B



PL-SB490-B

POLES FITTER



S4VT1500B (4" SQ POLE)
S5VT1500B (5" SQ POLE)




S4HT218BZ (4" SQ POLE)
S5HT218BZ (5" SQ POLE)



S4HT290BZ (4" SQ POLE)
S5HT290BZ (5" SQ POLE)




S4HT390BZ (4" SQ POLE)




S4HT490BZ (4" SQ POLE)


SQUARE BRACKET




PL-SM218-B (4" SQ POLE)



S5VT2S18BZ (5" SQ POLE)



S4VT3S18BZ (4" SQ POLE)
S5VT3S18BZ (5" SQ POLE)



S4VT4S90BZ (4" SQ POLE)
S5VT4S90BZ (5" SQ POLE)

ROUND POLE ADAPTER



RPA3-B (3" Bronze)
RPA4-B (4" Bronze)
RPA5-B (5" Bronze)

TENON REDUCER



TR2.37BZ (2-3/8" TO 1/2")




TR3BZ (3" TO 2-3/8")




R4VT1500BZ (4" TO 2-3/8")

WALL MOUNT BRACKET



WMB1HB




WMB1VB

SWIVEL BRACKET



SB2BZ (RATED FOR 18LBS. MAX)


WOOD POLES COLLAR BULLHORN



PL-CB190-9B (POLE Ø 5"-9")
PL-CB190-13B (POLE Ø 10"-13")



PL-CB218-9B (POLE Ø 5"-9")
PL-CB218-13B (POLE Ø 10"-13")




PL-CB390-9B (POLE Ø 5"-9")
PL-CB390-13B (POLE Ø 10"-13")



PL-CB490-9B (POLE Ø 5"-9")
PL-CB490-13B (POLE Ø 10"-13")


* 50 lbs max / arm for poles ø 5"-9" applicable brackets | 90 lbs max/arm for poles ø 10"-13" applicable brackets

WOOD POLES ANGLE CROSSARM




PL-XAB2-B (2 FIXTURES)
PL-XAB3-B (3 FIXTURES)
PL-XAB4-B (4 FIXTURES)
PL-XAB5-B (5 FIXTURES)

STEEL POLES COLLAR CROSSARM



PL-XCB2-B (2 FIXTURES)
PL-XCB3-B (3 FIXTURES)
PL-XCB4-B (4 FIXTURES)

STEEL POLES SIDE CROSSARM



PL-XSB2-B (2 FIXTURES)
PL-XSB3-B (3 FIXTURES)
PL-XSB4-B (4 FIXTURES)
PL-XSB5-B (5 FIXTURES)
PL-XSB6-B (6 FIXTURES)

FLOOD ACCESSORIES



JBOXB-4TH



MTGCOVER



GROUNDSTAKE

* Review product specs on our website for dimensions or contact us for a detailed drawing

**GuardMax™
Oval Wall Packs**



CCTs Available:



MODEL NUMBER	SECR15U-CSBPC	SECR15U-CSBPCE0	SECR15U-CSBPCE2
ORDER CODE	110955	110956	110957
Input Wattage	15W		
Voltage	120-277V 50/60Hz		
Delivered Lumens (lm)	1,900 - 1,940		
Efficacy (lm/W)	132-138		
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3000K/4000K/5000K (5000K default)		
Battery	No Battery	OC battery included	-20C battery included
LISTINGS	UL, FCC and DLC Premium		

White finish also available.

GuardMax™ Slim Security Light



CCTs Available:



MODEL NUMBER	SECS15UCSBPC	SECS26UCSBPC
ORDER CODE	103975	103856
Input Wattage	15W	26W
Voltage	120-277V	
Delivered Lumens (lm)	1,900 lm	3,320 lm
Efficacy (lm/W)	126 lm/W	124 lm/W
Color Rendering Index (CRI)	80	80
Color Temperature (CCT)	4000K/5000K	
Replacement	100W MH	175W MH
Controls	Integral photocell with on/off switch	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL, FCC, IP66	

GuardMax™ Slim Security Light (DLC)



CCTs Available:



MODEL NUMBER	SECS15UD-CSBPC	SECS30U-WCSBPC
ORDER CODE	104056	104059
Input Wattage	15W	15/25/30W
Voltage	120-277V	
Delivered Lumens (lm)	2,100 lm	4,000 lm
Efficacy (lm/W)	140 lm/W	133 lm/W
Color Rendering Index (CRI)	80	
Color Temperature (CCT)	3000K/4000K/5000K	
Replacement	100W	175W
Controls	Integral photocell with on/off switch	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	DLC Premium, UL, FCC, IP66	

GuardMax™ Emergency Motion Sensor Security Light



CCTs Available:



MODEL NUMBER	EML-MS
Order Code	105537
Input Wattage	Battery
Voltage	100-300V
Delivered Lumens (lm)	89 lm per head
Color Temperature (CCT)	6000K-6500K
Controls	Photocell & 130° detection Motion Sensor
LISTINGS	UL 924 WL

LED Lamp Included Vaporproof Jelly Jars



	WALL MOUNT	CEILING MOUNT
MODEL NUMBER	JJW12001	JJC12001
ORDER CODE	101439	101443
Number of Lamps	1 x A19 E26 Base	1 x A19 E26 Base
Voltage	120V	120V
Max Wattage	100W INC	100W INC
LISTINGS	UL, ENERGY STAR*	UL, ENERGY STAR*

JA8 and ENERGY STAR® certified lamp included. Optional dusk to dawn lamp with intergrated photocell available.

CCTs Available:



LED Integrated Adjustable Vaporproof Jelly Jars w/Selectable CCT



MODEL NUMBER	JJX20UCS
ORDER CODE	105177
Input Wattage	20W
Voltage	120-277V
Delivered Lumens (lm)	1,800 lm
Efficacy (lm/W)	90 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	3000K/4000K/5000K
Replacement	150W INC
Dimming Compatible	N/A
Lumen Maintenance (L70)	≥50,000 hours
Mounting	Pendant, Ceiling, Wall Mount
LISTINGS	UL, IP65, ENERGY STAR®, FCC

CCTs Available:



M Series™ - Wall Mounts



MODEL NUMBER	M40U4W-CSBWCR	M55U4W-CSBWCR	M75U4W-CSBWCR	M100U4W-CSBWCR
ORDER CODE	106191	106195	106200	106207
Input Wattage	40W	55W	75W	100W
Voltage	120-277V (277-480V available as option)			
Delivered Lumens (lm)	5,260 lm	7,170 lm	9,860 lm	12,670 lm
Efficacy (lm/W)	131.5 lm/W	130 lm/W	131.5 lm/W	127 lm/W
Color Rending Index (CRI)	>70 (>80 option available)			
Color Temperature (CCT)	3000K/4000K/5000K			
Replacement	125W MH	150W MH	200W MH	250W MH
Controls	Field installable c-Max (twist lock receptacles available)			
Lumen Maintenance (L70)	> 150,000 hrs			
Mounting	Fixed, Variable (adjustable) and EM with 4 x 1/2" threaded conduit holes (one on each side)			
LISTINGS	UL, DLC Premium, ANSI 3G rated			

CCTs Available:



6 distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Visual Comfort Lens accessory and Battery Backup options also available.

M Series™ - Wall Mounts



MODEL NUMBER	M125U4W-CSBWCR	M150U4W-CSBWCR	M200U4W-CSBWCR	M250U4W-CSBWCR	M320U4W-CSBWCR
ORDER CODE	106214	106221	106226	106231	106237
Input Wattage	125W	150W	200W	250W	320W
Voltage	120-277V (277-480V available as option)				
Delivered Lumens (lm)	18,800 lm	21,200 lm	29,220 lm	36,690 lm	46,290 lm
Efficacy (lm/W)	150 lm/W	141 lm/W	146 lm/W	147 lm/W	144.5 lm/W
Color Rendering Index (CRI)	>70 (>80 option available)				
Color Temperature (CCT)	3000K/4000K/5000K (Selectable, 2200K option)				
Replacement	320/350W MH	400W MH	750W MH	750/1000W MH	1,000 MH
Controls	Field installable c-Max (twist lock receptacles available)				
Lumen Maintenance (L70)	> 150,000 hrs				
Mounting	Fixed, Variable (adjustable) and EM with 4 x 1/2" threaded conduit holes (one on each side)				
LISTINGS	UL, DLC Premium, ANSI 3G rated				

CCTs Available:



6 distributions available (3M, 4N, 4W, 5 Square, Low Glare 3G and W), Visual Comfort Lens accessory and Battery Backup options also available.

WallMax™ Cut Off Wall Packs



MODEL NUMBER	WPC15UT4-CSBPCCR	WPC20UT4-CSBPCCR	WPC28UT4-WCSBPCCR
ORDER CODE	108415	108416	108417
Input Wattage	15W	20W	15/20/28W
Voltage	120-277V (277-480V available as option 28W+)		
Delivered Lumens (lm)	2,300 lm	3,000 lm	4,100 lm
Efficacy (lm/W)	153 lm/W	150 lm/W	146 lm/W
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	150W MH	200W MH	250W MH
Controls	Photocell included and compatible with field installable c-Max controls standard (Third Party Controls also available)		
Lumen Maintenance (L70)	>100,000 hours		
LISTINGS	UL, DLC Premium		

CCTs Available:



High voltage 480V and battery backup options available.

WallMax™ Cut Off Wall Packs



MODEL NUMBER	WPC40UT4-CSBPCCR	WPC70UT4-CSBPCCR	WPC100UT4-WCSBPCCR
ORDER CODE	108418	108419	108420
Input Wattage	40W	70W	40/70/100W
Voltage	120-277V (277-480V available as option 28W+)		
Delivered Lumens (lm)	5,800 lm	10,100 lm	13,500 lm
Efficacy (lm/W)	145 lm/W	144 lm/W	135 lm/W
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	175W	200W	250W
Controls	Photocell included and compatible with field installable c-Max controls standard (Third Party Controls also available)		
Lumen Maintenance (L70)	>100,000 hours		
LISTINGS	UL, DLC Premium		

CCTs Available:



High voltage 480V and battery backup options available.

WallMax™ Thin Cutoff Wall Packs



15-29W



CCTs Available:



MODEL NUMBER	WTC15U-CSBPC	WTC25U-WCSBPC	WTC29U-WCSBPC
ORDER CODE	111063	111064	111065
Input Wattage	15W	25W	29W
Voltage	120V-277V	120V-277V	120V-277V
Delivered Lumens (lm)	2,100-2,280 lms	3,430- 3,710 lms	4,010-4,290 lms
Efficacy (lm/W)	139-152 lm/W	138-148 lm/W	135-148 lm/W
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	50W	100W	150W
Controls	c-Max Compatible using CEA accessory		
Lumen Maintenance (L70)	100,000+ hours		
LISTINGS	UL, DLC Premium		

White finish also available.

WallMax™ Thin Cutoff Wall Packs



50-120W



CCTs Available:



MODEL NUMBER	WTC50U-CSBPC	WTC75U-WCSBPC	WTC120U-WCSBPC
ORDER CODE	111316	111066	111067
Input Wattage	50W	75W	120W
Voltage	120V-277V	120V-277V	120V-277V
Delivered Lumens (lm)	6,810-7,310 lms	9,600-10,640 lms	15,260- 17,010 lms
Efficacy (lm/W)	136-146 lm/W	126-142 lm/W	126-142 lm/W
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	175W	250W	400W
Controls	c-Max Compatible using CEA accessory		
Lumen Maintenance (L70)	100,000+ hours		
LISTINGS	UL, DLC Premium		

White finish also available.

WallMax™ Open Face Wall Packs



CCTs Available:



MODEL NUMBER	WPOP28U-CSBCR	WPOP40U-CSBCR	WPOP55U-WCSBCR
ORDER CODE	104898	104899	105518
Input Wattage	28W	40W	28/40/55W
Voltage	120-277V (277-480V available as option)		
Delivered Lumens (lm)	>3,700 lm	>5,400 lm	>7,200 lm
Efficacy (lm/W)	>130 lm/W		
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	150W	175W	250W
Controls	Compatible with field installable c-Max controls standard (Third party controls also available)		
Lumen Maintenance (L70)	>100,000 hours		
LISTINGS	UL, DLC Premium		

High voltage 480V and battery backup options available.

WallMax™ Open Face Wall Packs



c-Max™ CR
CONTROLS COMPATIBLE CONTROLS READY



MODEL NUMBER	WPOP80U-CSBCR	WPOP120U-WCSBCR
ORDER CODE	104901	105519
Input Wattage	80W	80/100/120W
Voltage	120-277V (277-480V available as option)	
Delivered Lumens (lm)	>11,000 lm	>16,300 lm
Efficacy (lm/W)	>130 lm/W	
Color Rendering Index (CRI)	>80	
Color Temperature (CCT)	3000K/4000K/5000K	
Replacement	400W	750W
Controls	Compatible with field installable c-Max controls standard (Third party controls also available)	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL, DLC Premium	

High voltage 480V and battery backup options available.

CCTs Available:



WallMax™ Compact Open Face Wall Packs



c-Max™
CONTROLS COMPATIBLE



MODEL NUMBER	WCOP28U-CSBPC	WCOP40U-CSBPC	WCOP60U-WCSBPC
ORDER CODE	105017	105936	105937
Input Wattage	28W	40W	28/40/60W
Voltage	120-277V		
Delivered Lumens (lm)	>3,500 lm	>4,800 lm	>7,700 lm
Efficacy (lm/W)	>120 lm/W	>120 lm/W	131 lm/W
Color Rendering Index (CRI)	>80		
Color Temperature (CCT)	3000K/4000K/5000K		
Replacement	150W	175W	250W
Controls	Integral photocell included with on/off switch		
Lumen Maintenance (L70)	>100,000 hours		
LISTINGS	UL, DLC Premium		

CCTs Available:



WallMax™ Compact Open Face Wall Packs



c-Max™
CONTROLS COMPATIBLE



MODEL NUMBER	WCF80U-WCSBPC	WCOP120U-WCSBPC
ORDER CODE	111240	108277
Input Wattage	80W	80/100/120W
Voltage	120-277V	
Delivered Lumens (lm)	>12,000 lm	>17,000 lm
Efficacy (lm/W)	148 lm/W	142 lm/W
Color Rendering Index (CRI)	>80	
Color Temperature (CCT)	3000K/4000K/5000K	
Replacement	400W	750W
Controls	Integral photocell included with on/off switch	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL, DLC Premium	

CCTs Available:



Battery backup option available on WCF Series

Flood Class I Division 1 HL-AR-D1 Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

MODEL NUMBER	HL-AR100UW-50G-D1	HL-AR150UW-50G-D1
ORDER CODE	1409543	1409545
Input Wattage	100W	150W
Voltage	120-277V	
Delivered Lumens (lm)	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5000K	
Distribution	120°	
Replacement	400W MH	400W PSMH
Temperature Rating	T6	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL844, UL1598, UL1598A, DLC Premium	

Flood Class I Division 2 HL-AR Series



347-480V options also available.
Available in 25°, 60°, and 120° beam angles.

CCTs Available:

5000K

MODEL NUMBER	HL-AR100UW-50G	HL-AR150UW-50G
ORDER CODE	1409413	107620
Input Wattage	100W	150W
Voltage	120-277V	
Delivered Lumens (lm)	12,000 lm	18,245 lm
Efficacy (lm/W)	120 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5000K	
Distribution	120°	
Replacement	400W MH	400W
Temperature Rating	T4A	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL1598A, UL844, DLC Premium	

Wall Pack Class I Division 2 HL-WP Series



CCTs Available:

4000K

5000K

MODEL NUMBER	HL-WP26U40	HL-WP26U50	HL-WP43U40	HL-WP43U50
ORDER CODE	14101835	14101734	14101837	14101836
Input Wattage	26W	26W	43W	43W
Voltage	120-277V			
Delivered Lumens (lm)	3,199 lm	3,332 lm	5,316 lm	5,538 lm
Efficacy (lm/W)	121 lm/W	126 lm/W	123 lm/W	128 lm/W
Color Rendering Index (CRI)	≥80	≥80	≥80	≥80
Color Temperature (CCT)	4000K	5000K	4000K	5000K
Distribution	110°			
Replacement	70W HID	70W HID	150W HID	150W HID
Dimming Compatible	0-10V			
Temperature Rating	T4			
Lumen Maintenance (L70)	147,000 hours			
LISTINGS	IP66, BAA, ETL			

*BAA - Contact MaxLite for lead times.

Linear Class I Division 2 HL-LI Series



CCTs Available:

5000K

MODEL NUMBER	HL-LI2440	HL-LI4880
ORDER CODE	1409547	1409549
Input Wattage	40W	80W
Voltage	120-277V	
Delivered Lumens (lm)	5,480 lm	10,960 lm
Efficacy (lm/W)	130 lm/W	
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5000K	
Temperature Rating	T3C	
Lumen Maintenance (L70)	>100,000 hours	
LISTINGS	UL844, UL8750, UL1598A, DLC Premium	

40W = 2-FT, 80W = 4-FT
347-480V options also available.
Available in 110° beam angles.

Linear Class I Division 1 HL-LI Series



CCTs Available:

5000K

MODEL NUMBER	HL-LI2440UP-D1	HL-LI4880UP-D1
ORDER CODE	103013	103014
Input Wattage	38W	80W
Voltage	120-277V	
Delivered Lumens (lm)	4,500 lm	9,200 lm
Efficacy (lm/W)	118 lm/W	115 lm/W
Color Rendering Index (CRI)	> 70	
Color Temperature (CCT)	5000K	
Replacement	150W MH	250W MH
Dimming Compatible	0-10V	
Lumen Maintenance (L70)	>50,000 hours	
Mounting	Pendant Mount	
LISTINGS	DLC Standard, UL844, UL8750, UL1598A, UL1598, FCC	

Available with yoke mount; secondary retention point, safety cable (rated for 250lbs), and EM option.

High Bay Class I Division 2 HLRS Series



CCTs Available:

5000K

MODEL NUMBER	HLRS45UP	HLRS65UP
ORDER CODE	103299	103300
Input Wattage	42W	65W
Voltage	120-277V	
Delivered Lumens (lm)	6,685 lm	10,136 lm
Efficacy (lm/W)	158 lm/W	156 lm/W
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5000K	
Beam Angle	110°	
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL1598, UL1598A, UL844, FCC	

347-480V options also available. Pendant, Yoke, Ceiling, Wall and Stanchion mount options available.



High Bay Class I Division 2 HLRM Series



CCTs Available:

5000K

MODEL NUMBER	HLRM80U	HLRM120U	HLRM150U	HLRM200U
ORDER CODE	104877	104894	104912	104931
Input Wattage	80	120	150	200
Voltage	120-277			
Delivered Lumens (lm)	12000	18000	22500	30000
Efficacy (lm/W)	150			
Color Rendering Index (CRI)	80			
Color Temperature (CCT)	5000K			
Beam Angle	110°			
Replacement	320W MH	450W MH	600W MH	750W MH
Temperature Rating	X			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	cETLus Classified, FCC, IP66			

347-480V; Drop lens and Diffused lens options available. Wire guard, Yoke bracket, Wall and Stanchion mount accessories also available.

Low Bay/Jelly Jar Class I Division 2 HLRS Series



CCTs Available:

5000K

MODEL NUMBER	HLRS45ULP	HLRS65ULP
ORDER CODE	103301	103302
Input Wattage	45W	65W
Voltage	120-277V	
Delivered Lumens (lm)	5,760 lm	8,900 lm
Efficacy (lm/W)	136 lm/W	137 lm/W
Color Rendering Index (CRI)	≥70	
Color Temperature (CCT)	5000K	
Distribution	130°	
Replacement	100W MH	175W MH
Temperature Rating	T4A-T5	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL1598, UL1598A, UL844, FCC	

347-480V options also available. Pendant, Swivel, Ceiling, Wall and Stanchion mount options available.

LED Emergency Lights



MODEL NUMBER	EML-2HW	EML-2HWHORC
ORDER CODE	14101480	14101481
Voltage	120 or 277V	
Finish	White	
Mounting	Ceiling or Wall	
Options	SD & WL	Remote Capable Standard, SD & WL
LISTINGS	UL924 DL	

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED High Capacity Emergency Lights



MODEL NUMBER	EML-2HWHC	EML-2HWHCRC
ORDER CODE	105863	105864
Voltage	120 or 277V	
Finish	White	
Mounting	Ceiling or Wall	
Options	SD & WL	Remote Capable, SD & WL
LISTINGS	UL924 DL	

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED Remote Heads



ERI (Indoor)



ERO (Outdoor)



MODEL NUMBER	ERI-SW	ERI-2HW	ERO-SW	ERO-2HW
ORDER CODE	14101482	14101483	14101484	14101485
Voltage	LV			
Finish	White			
Mounting	Ceiling or Wall			
Options	Single Head, Indoor	Double Head, Indoor	Single Head, Outdoor	Double Head, Outdoor
LISTINGS	cUL DL			

See data sheet for remote capable fixture compatibility.

LED High Capacity Remote Heads



(Use with High Capacity Emergency Light only)



MODEL NUMBER	ER-SWHC	ER-2HWHC
ORDER CODE	108393	108394
Voltage	LV	
Finish	White	
Mounting	Ceiling or Wall	
Options	Single Head, Indoor	
LISTINGS	cUL DL	

See data sheet for remote capable fixture compatibility.

LED Exit Signs



MODEL NUMBER	EXT-RW	EXT-GW	EX-RWRC	EX-GWRC
ORDER CODE	105541	105542	103369	103368
Voltage	120 or 277			
Finish	Red & White	Green & White	Red & White	Green & White
Mounting	Ceiling or Wall			
Options	SD & WL	SD & WL	Remote Capable, SD & WL	
LISTINGS	UL 924 DL			

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED Exit Sign Combos



MODEL NUMBER	EXTC-RW	EXTC-GW	EXC-RWRC	EXC-GWRC
ORDER CODE	105543	105544	103370	103371
Voltage	120 or 277			
Finish	Red & White	Green & White	Red & White	Green & White
Mounting	Ceiling or Wall			
Options	SD & WL	SD & WL	Remote Capable, SD & WL	Remote Capable, SD & WL
LISTINGS	UL 924 DL			

RC (Remote Capable) SD (Self-Diagnostic) and WL (Wet Location) options available.

LED Edgelit Exit Signs



MODEL NUMBER	EXE-RS1S	EXE-RS2S	EXE-GS1S	EXE-GS2S
ORDER CODE	105539	105540	105545	105546
Voltage	120 or 277			
Finish	Red & Silver	Red & Mirror	Green & Silver	Green & Mirror
Mounting	Ceiling or Wall			
Options	Sided	Two Sided	Sided	Two Sided
LISTINGS	UL 924 DL			

Also available in white housing.

LED Aluminum Exit and Combo Signs



MODEL NUMBER	EXA-RW	EXA-GW	EXAC-RW	EXAC-GW
ORDER CODE	108895	108896	108897	108898
Voltage	120 or 277			
Finish	Red & Aluminum	Green & Aluminum	Red & Aluminum	Green & Aluminum
Mounting	Ceiling or Wall			
Combo	-		Includes adjustable linear LEDs standard	
Options	Remote Test Capability			
LISTINGS	CSA (UL 924)			

A19 - 4.5W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EF4.5A19D27/JA81	EF4.5A19D30/JA81	EFF4.5A19D27/JA81	EFF4.5A19D30/JA81
ORDER CODE	110545	110546	110547	110548
Input Wattage	4.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	450 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K, 3000K			
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

A19 - 10W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EF10A19D927/JA81	EF10A19D930/JA81	EFF10A19D927/JA81	EFF10A19D930/JA81
ORDER CODE	110553	110554	110555	110556
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K, 3000K			
Replacement	75W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

A21 - 13W, LED Clear/Frosted Filament A-Lamp - JA8



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)	A21 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	EF13A21D927/JA81	EF13A21D930/JA81	EFF13A21D927/JA81	EFF13A21D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	13W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1600 lm			
Efficacy (lm/W)	123 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K, 3000K			
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			



A19 - 4.5W, 10W, 13W, LED Frosted Filament A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EFF4.5A19D27*	EFF10A19D27	EFF13A21D27
ORDER CODE	14101717	14101720	14101723
Input Wattage	4.5W	10W	13W
Voltage	120V		
Delivered Lumens (lm)	450 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	100 lm/W	110 lm/W	123 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	2700K		
Replacement	40W INC	75W INC	100W INC
Dimming Range	Yes - Triac/10-100%		
Lumen Maintenance (L70)	15,000 hours		
LISTINGS	UL		

3000K and 5000K options.

A19 - 8.5W, LED Frosted Filament A-Lamp - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	EFF8.5A19D927/JA81	EFF8.5A19D930/JA81
ORDER CODE	110549	110550
Input Wattage	8.5W	8.5W
Voltage	120V	
Delivered Lumens (lm)	800 lm	
Efficacy (lm/W)	94 lm/W	
Color Rendering Index (CRI)	90	
Color Temperature (CCT)	2700K	3000K
Replacement	60W INC	
Dimming Range	Yes - Triac/10-100%	
Lumen Maintenance (L70)	15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E	

ST19 - 5W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F5ST19DLED922/JA81	F5ST19DLED927/JA81	F5ST19DLED930/JA81
ORDER CODE	110577	110615	110616
Input Wattage		5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 8.5W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F8ST19DLED922/JA81	F8ST19DLED927/JA81	F8ST19DLED930/JA81
ORDER CODE	110578	110617	110618
Input Wattage		8.5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		800 lm	
Efficacy (lm/W)		94 lm/W	
Color Rendering Index (CRI)	90	90	90
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		60W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 10W, LED Clear Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	F10ST19DLED922/JA81	F10ST19DLED927/JA81	F10ST19DLED927/JA81
ORDER CODE	110579	110619	110620
Input Wattage		10W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 5W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V5ST19DLED922/JA81	V5ST19DLED927/JA81	V5ST19DLED930/JA81
ORDER CODE	110580	110621	110622
Input Wattage		5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		450 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		40W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 8.5W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V8ST19DLED922/JA81	V8ST19DLED927/JA81	V8ST19DLED930/JA81
ORDER CODE	110579	110619	110624
Input Wattage		8.5W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		765 lm	
Efficacy (lm/W)		90 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		60W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 10W, LED Vintage Filament Lamp - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V10ST19DLED922/JA81	V10ST19DLED927/JA81	V10ST19DLED930/JA81
ORDER CODE	110582	110621	110626
Input Wattage		10W	
Voltage		120V AC, 60Hz	
Delivered Lumens (lm)		1000 lm	
Efficacy (lm/W)		100 lm/W	
Color Rendering Index (CRI)		≥90	
Color Temperature (CCT)	2200K	2700K	3000K
Replacement		100W INC	
Dimming Range		Yes - Triac/10-100%	
Lumen Maintenance (L70)		15,000 hours	
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

ST19 - 6.5W, 7W, LED Clear/Vintage Filament Lamps - JA8



CCTs Available:



	ST19 (E26 BASE)	ST19 (E26 BASE)
MODEL NUMBER	V6.5ST19DLED922/JA8	F7ST19DLED927/JA8
ORDER CODE	1409893	14098828
Input Wattage	6.5W	7W
Voltage	120V	
Delivered Lumens (lm)	450 lm	600 lm
Efficacy (lm/W)	69 lm/W	86 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	2200K	2700K
Replacement	40W INC	60W INC
Dimming Compatible	Yes - Triac/10-100%	
Lumen Maintenance (L70)	15,000 hours	
LISTINGS	UL listed, RoHS Compliant, FCC, T20, JA8-2022-E	

B10 - 3.5W, 5W, LED Frosted Filament Candelabras



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EFF3.5B1027	EFF3.5B1027C	EFF5B1027	EFF5B1027C
ORDER CODE	14101729	14101727	14101733	14101731
Input Wattage	3.5W	3.5W	5W	5W
Voltage	120V	120V	120V	120V
Delivered Lumens (lm)	325 lm	325 lm	525 lm	525 lm
Efficacy (lm/W)	92 lm/W	92 lm/W	105 lm/W	105 lm/W
Color Rendering Index (CRI)	80	80	80	80
Color Temperature (CCT)	2700K	2700K	2700K	2700K
Replacement	40W INC	40W INC	60W INC	60W INC
Dimming Compatible	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 hours	15,000 hours	15,000 hours	15,000 hours
LISTINGS	UL	UL	UL	UL

B10 - 3.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EF3B10D927/JA81	EF3B10D930/JA81	EFF3B10D927/JA81	EFF3B10D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	3.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	315 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

B10 - 5.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)	B10 BLUNT TIP (E12 BASE)
MODEL NUMBER	EF5B10D927/JA81	EF5B10D930/JA81	EFF5B10D927/JA81	EFF5B10D930/JA81
ORDER CODE	110557	110558	110559	110560
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

BA10 - 5.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)
MODEL NUMBER	EF5BA10D927/JA8	EF5BA10D930/JA8	EFF5BA10D927/JA8	EFF5BA10D930/JA8
ORDER CODE	110573	110574	110575	110576
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	600 lm			
Efficacy (lm/W)	100 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

BA10 - 4.5W, LED Clear/Frosted Filament Candelabras - JA8



CCTs Available:



	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)	B10 BLUNT TIP (E26 BASE)
MODEL NUMBER	EF5B10D927/JA81	EF3.5BA10D930/JA8	EFF3.5BA10D927/JA8	EFF3.5BA10D930/JA8
ORDER CODE	110569	110570	110571	110572
Input Wattage	4.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	405 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			



B10 - 4W, LED Clear Filament Candelabras - JA8



CCTs Available:



	B10 (E12 BASE)	B10 (E12 BASE)
MODEL NUMBER	EF4B10D927/JA8/G1	EF4B10D930/JA8/G1
ORDER CODE	109161	109166
Input Wattage		4W
Voltage		120V
Delivered Lumens (lm)		300 lm
Efficacy (lm/W)		75 lm/W
Color Rendering Index (CRI)	90	90
Color Temperature (CCT)	2700K	3000K
Replacement		40W INC
Dimming Compatible		Yes
Lumen Maintenance (L70)		15,000 hours
LISTINGS	UL, T20, JA8	

CA10/BA10 - 3.5W, 5W, LED Frosted Filament Flame Tip Candelabras



CCTs Available:



	CA10/B10 BENT TIP (E26 BASE)	CA10/B10 BENT TIP (E12 BASE)	CA10/B10 BENT TIP (E26 BASE)	CA10/B10 BENT TIP (E12 BASE)
MODEL NUMBER	EFF3.5BA1027	EFF3.5BA1027C	EFF5BA1027	EFF5BA1027C
ORDER CODE	14101728	14101726	14101732	14101730
Input Wattage	3.5W	3.5W	5W	5W
Voltage			120V	
Delivered Lumens (lm)	325 lm	325 lm	525 lm	525 lm
Efficacy (lm/W)	92 lm/W	92 lm/W	105 lm/W	105 lm/W
Color Rendering Index (CRI)			80	
Color Temperature (CCT)			2700K	
Replacement	40W INC	40W INC	60W INC	60W INC
Dimming Compatible			Yes - Triac/10-100%	
Lumen Maintenance (L70)			15,000 hours	
LISTINGS	UL			

T12 - 8.5W, LED Clear/Frosted Filament Lamps - JA8



CCTs Available:



	T12 FROSTED (GU24 BASE)	T12 FROSTED (E26 BASE)	T12 CLEAR (E26 BASE)
MODEL NUMBER	EFF8.5T12GUD927/JA8**	EFF8.5T12D927/JA8*	EF8.5T12D927/JA8*
ORDER CODE	101318	103044	101335
Input Wattage		8.5W	
Voltage		120V	
Delivered Lumens (lm)		800 lm	
Efficacy (lm/W)		94 lm/W	
Color Rendering Index (CRI)		90	
Color Temperature (CCT)		2700K	
Replacement		60W INC	
Dimming Compatible		No	
Lumen Maintenance (L70)		11,000 hours	
LISTINGS		UL, T20, JA8	

*2700K and 3000K options.
**2700K, 3000K, and 4000K options.

T10 - 4W, LED Clear Filament Lamp - JA8



CCTs Available:



	T10 (E26 BASE)
MODEL NUMBER	F4T10DLED927/JA8
ORDER CODE	1409894
Input Wattage	4W
Voltage	120V
Delivered Lumens (lm)	300 lm
Efficacy (lm/W)	75 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	2700K
Replacement	40W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	15,000 hours
LISTINGS	UL, T20, JA8

S14 - 2W, LED Clear/Frosted Filament Lamps



CCTs Available:



	CLEAR (E26 BASE)	FROSTED (E26 BASE)
MODEL NUMBER	F2S14ND27	FF2S14ND27
ORDER CODE	101418	101425
Input Wattage		2W
Voltage		120V
Delivered Lumens (lm)	180 lm	160 lm
Efficacy (lm/W)	90 lm/W	80 lm/W
Color Rendering Index (CRI)		80
Color Temperature (CCT)		2700K
Replacement		11W INC
Dimming Compatible		No
Lumen Maintenance (L70)		15,000 hours
LISTINGS		UL

G16.5 - 3.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G16.5 CLEAR (E12 BASE)	G16.5 CLEAR (E12 BASE)	G16.5 FROSTED (E12 BASE)	G16.5 FROSTED (E12 BASE)
MODEL NUMBER	EF3G16.5D927/JA8	EF3G16.5D930/JA8	EFF3G16.5D927/JA81	EFF3G16.5D930/JA81
ORDER CODE	110583	110584	110585	110586
Input Wattage	3.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	315 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	25W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G16.5 - 5.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G16.5 CLEAR (E12 BASE)	G16.5 CLEAR (E12 BASE)	G16.5 FROSTED (E12 BASE)	G16.5 FROSTED (E12 BASE)
MODEL NUMBER	EF5G16.5D927/JA8	EF5G16.5D930/JA8	EFF5G16.5D927/JA81	EFF5G16.5D930/JA81
ORDER CODE	110587	110588	110589	110590
Input Wattage	5.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G25 CLEAR (E26 BASE)	G25 CLEAR (E26 BASE)	G25 FROSTED (E26 BASE)	G25 FROSTED (E26 BASE)
MODEL NUMBER	EF8.5G25D927/JA81	EF8.5G25D930/JA81	EFF8.5G25D927/JA81	EFF8.5G25D930/JA81
ORDER CODE	110595	110596	110593	110594
Input Wattage	5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	450 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	40W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 8.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G25 CLEAR (E26 BASE)		G25 FROSTED (E26 BASE)	
MODEL NUMBER	EF8.5G25D927/JA81	EF8.5G25D930/JA81	EFF8.5G25D927/JA81	EFF8.5G25D930/JA81
ORDER CODE	110595	110596	110597	110598
Input Wattage	8.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	800 lm			
Efficacy (lm/W)	94 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 8.5W, LED Clear Filament Globe - JA8



CCTs Available:



	G25 CLEAR (E26 BASE)	
MODEL NUMBER	EF8.5G25D927/JA8	
ORDER CODE	104845	
Input Wattage	8.5W	
Voltage	120V	
Delivered Lumens (lm)	800 lm	
Efficacy (lm/W)	94 lm/W	
Color Rendering Index (CRI)	90	
Color Temperature (CCT)	2700K	
Replacement	40W Inc	
Dimming Compatible	Yes - Triac/10-100%	
Lumen Maintenance (L70)	15,000 hours	
LISTINGS	UL, ENERGY STAR®	

G25 - 10W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G25 CLEAR (E26 BASE)		G25 FROSTED (E26 BASE)	
MODEL NUMBER	EF10G25D927/JA81	EF10G25D930/JA81	EFF10G25D927/JA81	EFF10G25D930/JA81
ORDER CODE	110599	110600	110601	110602
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	150W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G25 - 3W, 4.5W, LED Clear/Frosted Filament Globes



CCTs Available:



	G25 CLEAR (E26 BASE)	G25 CLEAR (E26 BASE)	G25 FROSTED (E26 BASE)
MODEL NUMBER	EF3G25D27	EF3G25D50	EFF4.5G25D27
ORDER CODE	103764	103765	103770
Input Wattage	3W	3W	4.5W
Voltage	120V		
Delivered Lumens (lm)	350 lm	350 lm	450 lm
Efficacy (lm/W)	116 lm/W	116 lm/W	90 lm/W
Color Rendering Index (CRI)	80	80	90
Color Temperature (CCT)	2700K	5000K	2700K
Replacement	40W Inc		
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	15,000 hours		
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E		

G40 - 8.5W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)	G40 CLEAR (E26 BASE)	G40 FROSTED (E26 BASE)	G25 FROSTED 4026 BASE)
MODEL NUMBER	EF8.5G40D927/JA81	EF8.5G40D930/JA81	EFF8.5G40D927/JA81	EFF8.5G40D930/JA81
ORDER CODE	110603	110604	110605	110606
Input Wattage	8.5W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	800 lm			
Efficacy (lm/W)	94 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	100W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G40 - 10W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)	G40 CLEAR (E26 BASE)	G40 FROSTED (E26 BASE)	G40 FROSTED (E26 BASE)
MODEL NUMBER	EF10G40D927/JA81	EF10G40D930/JA81	EFF10G40D927/JA81	EFF10G40D930/JA81
ORDER CODE	110607	110608	110609	110610
Input Wattage	10W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	1100 lm			
Efficacy (lm/W)	110 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	150W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G40 - 12W, LED Clear/Frosted Filament Globes - JA8



CCTs Available:



	G40 CLEAR (E26 BASE)	G40 CLEAR (E26 BASE)	G40 FROSTED (E26 BASE)	G40 FROSTED (E26 BASE)
MODEL NUMBER	EF12G40D927/JA81	EF12G40D930/JA81	EFF12G40D927/JA81	EFF12G40D930/JA81
ORDER CODE	110611	110612	110613	110614
Input Wattage	12 W			
Voltage	120V AC, 60Hz			
Delivered Lumens (lm)	500 lm			
Efficacy (lm/W)	90 lm/W			
Color Rendering Index (CRI)	≥90			
Color Temperature (CCT)	2700K	3000K	2700K	3000K
Replacement	60W INC			
Distribution	320°			
Dimming Range	Yes - Triac/10-100%			
Lumen Maintenance (L70)	15,000 Hrs			
LISTINGS	cETLus listed, RoHS Compliant, FCC, T20, JA8-2022-E			

G16.5 - 5W, Dimmable Globe Lamp



CCTs Available:



	G16 (E12 BASE)
MODEL NUMBER	5G16.5DLED927/G3
ORDER CODE	104065
Input Wattage	5W
Voltage	120V
Delivered Lumens (lm)	350 lm
Efficacy (lm/W)	80 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	2700K
Replacement	40W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, T20, FCC

G25 - 10W, Dimmable Globe Lamp - JA8



CCTs Available:



	G25 (E26 BASE)
MODEL NUMBER	10G25DLED927/JA8
ORDER CODE	1409460
Input Wattage	10W
Voltage	120V
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	80 lm/W
Color Rendering Index (CRI)	92
Color Temperature (CCT)	2700K
Replacement	100W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, RoHS Compliant, JA8

A19 - 6W, 11W, 13W, Dimmable Enclosed Rated A-Lamps



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E6A19DLED27/G8	E11A19DLED27/G8	E13A19DLED27/G1S
ORDER CODE	14099390	14099399	106884
Input Wattage	6W	11W	13W
Voltage	120V		
Delivered Lumens (lm)	480 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	100 lm/W	123 lm/W
Color Rendering Index (CRI)	82	84	80
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K		
Replacement	40W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, RoHS Compliant, FCC		

A19 - 6W, 9W, 15W, Dimmable Enclosed Rated A-Lamps



CCTs Available:



	A19 (GU24 BASE)	A19 (GU24 BASE)	A19 (GU24 BASE)
MODEL NUMBER	E6A19GUDLED27/G8S1	E9A19GUDLED27/G8S1	E15A19GUDLED27/G8S
ORDER CODE	108939	108943	14099414
Input Wattage	6W	9W	15W
Voltage	120V		
Delivered Lumens (lm)	480 lm	800 lm	1,600 lm
Efficacy (lm/W)	80 lm/W	89 lm/W	106 lm/W
Color Rendering Index (CRI)	80		
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K		
Replacement	40W INC	60W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, RoHS Compliant, FCC		

A19 - 5.5W, 9W, 11W, 15W, Dimmable Enclosed Rated A-Lamps - JA8



CCTs Available:



	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)	A19 (E26 BASE)
MODEL NUMBER	E5.5A19D927/JA8S1	E9A19D927/JA8S1	E11A19D927/JA8S1	E15A19D927/JA8S
ORDER CODE	108948	108951	108954	105484
Input Wattage	5.5W	9W	11W	15W
Voltage	120V			
Delivered Lumens (lm)	450 lm	800 lm	1,100 lm	1,600 lm
Efficacy (lm/W)	89 lm/W	90 lm/W	100 lm/W	x lm/W
Color Rendering Index (CRI)	90			
Color Temperature (CCT)	2700K, 3000K, 4000K			
Replacement	40W INC	60W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%			
Lumen Maintenance (L70)	25,000 hours			
LISTINGS	cETLus listed, FCC, T20, JA8			

A21/A23 - 17W, 21W, 26W, High Output Dimmable A-Lamps



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)	A23 (E26 BASE)
MODEL NUMBER	17A21D27	21A21D27	26A23D27
ORDER CODE	102721	102717	102713
Input Wattage	17W	21W	26W
Voltage	120V		
Delivered Lumens (lm)	2,000 lm	2,600 lm	3,000 - 3,200 lm
Efficacy (lm/W)	118 lm/W	123 lm/W	123 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K		
Replacement	125W INC	150W INC	200W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, FCC		

A21 - 20W, High Output Non-Dimmable A-Lamp



CCTs Available:



	A21 (E26 BASE)
MODEL NUMBER	E20A21ND30
ORDER CODE	105253
Input Wattage	20W
Voltage	120-277V
Delivered Lumens (lm)	2,600 lm
Efficacy (lm/W)	130 lm/W
Color Rendering Index (CRI)	80
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K
Replacement	150W INC
Dimming Compatible	No
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, RoHS Compliant, FCC

A21 - 4W, 9W, 15W, 21W, 3-Way A-Lamps



CCTs Available:



	A21 (E26 BASE)	A21 (E26 BASE)
MODEL NUMBER	15A21/3W927	21A21/3W27
ORDER CODE	14098774	14102107
Input Wattage	4W/9W/15W	21W
Voltage	120V	
Delivered Lumens (lm)	500/1000/1600	620/1,600/2,150 lm
Efficacy (lm/W)	> 100 lm/W	89/107/103 lm/W
Color Rendering Index (CRI)	91	80
Color Temperature (CCT)	2700K	2700K, 3000K, 5000K
Replacement	40/60/100W INC	50W/100W/150W INC
Dimming Compatible	No	
Lumen Maintenance (L70)	25,000 hours	
LISTINGS	UL, RoHS Compliant, FCC, T20	

A19 - 8W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:



MODEL NUMBER	E8A19DLED30/G2T
ORDER CODE	109717
Input Wattage	8W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	100 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	cETLus listed, RoHS Compliant, FCC

A19 - 10W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:



MODEL NUMBER	E10A19D27/4P/WS2T
ORDER CODE	109712
Input Wattage	10W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	1100 lm
Efficacy (lm/W)	110 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	cETLus listed, RoHS Compliant, FCC

A19 - 13W, Enclosed Rated Single Pack and Four Pack Wingstack A-Lamps



CCTs Available:



MODEL NUMBER	E13A19D27/4P/WS2T
ORDER CODE	109714
Input Wattage	13W
Voltage	120V AC, 60Hz
Delivered Lumens (lm)	1600 lm
Efficacy (lm/W)	123 lm/W
Color Rendering Index (CRI)	≥80
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K
Replacement	60W INC
Distribution	200° - 250°
Dimming	Dimmable. Forward Phase Cut 10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, RoHS Compliant, FCC

SMART A19 LAMP



MODEL NUMBER	E9A19SMTR
ORDER CODE	110371
Input Wattage	9W
Voltage	120V AC
Delivered Lumens (lm)	800 lms
Color Rendering Index (CRI)	≥ 80
Color Temperature (CCT)	RGB, 2700K-6500K Tunable
Replacement	60W Inc.
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL listed, FCC CFR Title 47 Part 15 Subpart B Class B, RoHS

A19 - 8W, CCT Selectable A-Lamp



A19 (E26 BASE)

MODEL NUMBER	E8A19D9CS/JA8
ORDER CODE	108391
Input Wattage	8W
Voltage	120-277V
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	100 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	2700K/3000K/4000K
Replacement	60W INC
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, RoHS Compliant, FCC, T20, RoHS Compliant, JA8-2022-E

CCTs Selectable:



A19 - 9W, CCT Selectable Dusk to Dawn A-Lamp



A19 (E26 BASE)

MODEL NUMBER	DTDE9A19NDCS
ORDER CODE	108274
Input Wattage	9W
Voltage	120-277V
Delivered Lumens (lm)	800 lm
Efficacy (lm/W)	83 lm/W
Color Rendering Index (CRI)	80
Color Temperature (CCT)	2700K/3000K/4000K
Replacement	60W INC
Dimming Compatible	No
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, T20, FCC, RoHS Compliant

CCTs Selectable:



PL Retrofit Lamps - 6W, Ballast Bypass CCT Selectable (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	6PLE26CS	6PLG24QCS	6PLGU24CS	6PLGX23CS
ORDER CODE	104735	104736	104737	104738
Input Wattage	6W			
Voltage	120-277V			
Delivered Lumens (lm)	550/575/600/625 lm			
Efficacy (lm/W)	92/96/100/104 lm/W			
Color Rendering Index (CRI)	80			
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K			
Replacement	9W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 8W, Ballast Bypass CCT Selectable (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	8PLE26CS	8PLG24QCS	8PLGU24CS	8PLGX23CS
ORDER CODE	104739	104740	104741	104742
Input Wattage	8W			
Voltage	120-277V			
Delivered Lumens (lm)	950/975/1,000/1,050 lm			
Efficacy (lm/W)	119/122/125/131 lm/W			
Color Rendering Index (CRI)	80			
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K			
Replacement	13W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 11W, Ballast Bypass CCT Selectable (UL-B)



CCTs Available:



	E26 BASE	G24Q BASE	GU24 BASE	GX23 BASE
MODEL NUMBER	11PLE26CS	11PLG24QCS	11PLGU24CS	11PLGX23CS
ORDER CODE	104743	104744	104745	104746
Input Wattage	11W			
Voltage	120-277V			
Delivered Lumens (lm)	1,400/1,425/1,450/1,500 lm			
Efficacy (lm/W)	127/130/132/136 lm/W			
Color Rendering Index (CRI)	80			
Color Temperature (CCT)	2700K/3000K/3500K/4000K/5000K			
Replacement	26W CFL			
Dimming Compatible	No			
Lumen Maintenance (L70)	50,000 hours			
LISTINGS	UL, FCC			

PL Retrofit Lamps - 9W, DirectFit Ballast Compatible CCT Selectable (UL-A)



CCTs Available:



	HORIZONTAL PL (G24q BASE)	VERTICAL PL (G24q BASE)
MODEL NUMBER	9PLG24QHCS	9PLG24QVCS
ORDER CODE	104733	104734
Input Wattage	9W	
Voltage	120-277V	
Delivered Lumens (lm)	1,025/1,050/1,100 lm	
Efficacy (lm/W)	93/95/100 lm/W	
Color Rendering Index (CRI)	80	
Color Temperature (CCT)	3000K/3500K/4000K	
Replacement	18/26 CFL	
Dimming Compatible	No	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL, DLC Standard, FCC	

PLL Retrofits, 13W, DirectFit Lamps



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	13PLLA35-CG	13PLLA40-CG	13PLLA50-CG
ORDER CODE	14100784	14100785	103285
Input Wattage	13W		
Voltage	120-277V		
Delivered Lumens (lm)	2,050 lm	2,100 lm	2,100 lm
Efficacy (lm/W)	124 lm/W	127 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K, 4000K, 5000K		
Replacement	40W CFL		
Dimming Compatible	No		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, FCC		

PLL Retrofits, 17W Bypass Lamps (Type B)



CCTs Available:



	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)	COATED GLASS (2G11 BASE)
MODEL NUMBER	17PLLB35-CG	17PLLB40-CG	17PLLB50-CG
ORDER CODE	14100787	14100788	14100789
Input Wattage	17W		
Voltage	120-277V		
Delivered Lumens (lm)	2,150 lm	2,200 lm	2,200 lm
Efficacy (lm/W)	127 lm/W	130 lm/W	130 lm/W
Color Rendering Index (CRI)	≥80		
Color Temperature (CCT)	3500K, 4000K, 5000K		
Replacement	40W CFL		
Dimming Compatible	No		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL Classified, UL UR, FCC		

MR16 - 6W, GU5.3 Base Lamps Flood - JA8



CCTs Available:



MR16 (GU5.3 BASE)	
MODEL NUMBER	6MR16D927FL35/JA8
ORDER CODE	103932
Input Wattage	6W
Voltage	12V AC
Delivered Lumens (lm)	440 lm
Efficacy (lm/W)	73 lm/W
Color Rendering Index (CRI)	90
Color Temperature (CCT)	2700K, 3000K
Replacement	35W INC
Beam Angle	35°
Dimming Compatible	No
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, FCC, T20, JA8

MR16 - 8W, GU5.3 Base Lamps Flood/Narrow Flood - JA8



CCTs Available:



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D5927SP15/JA8	8MR16D5927NF25/JA8	8MR16D5927FL35/JA8
ORDER CODE	103951	103953	103956
Input Wattage	8W		
Voltage	12V AC		
Delivered Lumens (lm)	580 lm		
Efficacy (lm/W)	73 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K, 3000K		
Replacement	50W INC		
Beam Angle	15°	25°	35°
Dimming Compatible	No		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, T20, JA8		

MR16 - 8W, GU5.3 Base Lamps Flood/Narrow Flood Spot - JA8



CCTs Available:



	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)	MR16 (GU5.3 BASE)
MODEL NUMBER	8MR16D7927SP15/JA8	8MR16D7927NF25/JA8	8MR16D7927FL35/JA8
ORDER CODE	103958	103961	103963
Input Wattage	8W		
Voltage	12V AC		
Delivered Lumens (lm)	595 lm		
Efficacy (lm/W)	74 lm/W		
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K, 3000K		
Replacement	75W INC	50W INC	50W INC
Beam Angle	15°	25°	35°
Dimming Compatible	No		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, T20, JA8		

MR16 - 4W, GU10 Base Lamps Flood



CCTs Available:



MR16 (GU10 BASE)	
MODEL NUMBER	4.5MR16GUD30FL
ORDER CODE	14099069
Input Wattage	4W
Voltage	120V
Delivered Lumens (lm)	315 lm
Efficacy (lm/W)	79 lm/W
Color Rendering Index (CRI)	80
Color Temperature (CCT)	2700K, 3000K
Replacement	35W INC
Beam Angle	40°
CBCP (cd)	418 cd
Dimming Compatible	Yes - Triac/10-100%
Lumen Maintenance (L70)	25,000 hours
LISTINGS	UL, RoHS Compliant

BR - 7W, 8W, 11W, 12W, 17W, Dimmable Lamps



CCTs Available:



	BR20 (E26 BASE)	BR30 (E26 BASE)	BR30 (E26 BASE)	BR40 (E26 BASE)	BR40 (E26 BASE)
MODEL NUMBER	7BR20DLED27/G3	8BR30DLED27/G3	11BR30DLED27/G3	12BR40DLED27/G3	17BR40DLED27/G3
ORDER CODE	14099046	14099049	14099421	14099052	14099418
Input Wattage	7W	8W	11W	12W	17W
Voltage	120V				
Delivered Lumens (lm)	550 lm	650 lm	850 lm	1,050 lm	1,400 lm
Efficacy (lm/W)	78 lm/W	81 lm/W	77 lm/W	88 lm/W	82 lm/W
Color Rendering Index (CRI)	80	84	83	82	82
Color Temperature (CCT)	2700K, 3000K, 4000K, 5000K				
Replacement	50W INC	65W INC	65W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%				
Lumen Maintenance (L70)	25,000 hours				
LISTINGS	cULus, FCC, RoHS Compliant				

Value R/BR - 6W, 8W, 13W, Dimmable Lamps



CCTs Available:



	R20 (E26 BASE)	BR30 (E26 BASE)	BR40 (E26 BASE)
MODEL NUMBER	6R20DV27	8BR30DV27	13BR40DV27
ORDER CODE	102574	102620	102630
Input Wattage	6W	8W	13W
Voltage	120V		
Delivered Lumens (lm)	325 lm	650 lm	900 lm
Efficacy (lm/W)	54 lm/W	81 lm/W	69 lm/W
Color Rendering Index (CRI)	≥82		
Color Temperature (CCT)	2700K, 3000K, 5000K		
Replacement	35W INC	65W INC	85W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	11,000 hours		
LISTINGS	cULus, RoHS Compliant		

PAR - 11W, 13W, 15W, Dimmable Lamps Wet Location



CCTs Available:



	PAR30 SHORT (E26 BASE)	PAR30 LONG (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	11P30D27FL	11P30WLN27FL	13P38WD27FL	13P38WD27NF	15P38WD27FL
ORDER CODE	14099226	14099203	14099206	14099219	14099210
Input Wattage	11W	11W	13W	13W	15W
Voltage	120V				
Delivered Lumens (lm)	850 lm	850 lm	1,050 lm	1,050 lm	1,250 lm
Efficacy (lm/W)	77 lm/W	77 lm/W	80 lm/W	80 lm/W	83 lm/W
Color Rendering Index (CRI)	83	83	80	80	83
Color Temperature (CCT)	2700K, 3000K, 4000K				
Replacement	75W INC	75W INC	100W INC	100W INC	120W INC
Beam Angle	40°	40°	40°	30°	40°
Dimming Compatible	Yes - Triac/10-100%				
Lumen Maintenance (L70)	25,000 hours				
LISTINGS	cULus, FCC, RoHS Compliant				

PAR - 11W, 14W, Dimmable Lamps - JA8 Wet Location



CCTs Available:



	PAR30 SHORT NECK (E26 BASE)	PAR30 LONG NECK (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	11P30D927FL/JA8	11P30LND927FL/JA8	14P38D927FL/JA8
ORDER CODE	14101683	14101685	14101687
Input Wattage	11W	11W	14W
Voltage	120V		
Delivered Lumens (lm)	975 lm	975 lm	1,250 lm
Efficacy (lm/W)	88 lm/W	88 lm/W	89 lm/W
Color Rendering Index (CRI)	90		
Color Temperature (CCT)	2700K, 3000K		
Replacement	75W INC	75W INC	100W INC
Dimming Compatible	Yes - Triac/10-100%		
Lumen Maintenance (L70)	25,000 hours		
LISTINGS	UL, T20, JA8		

PAR - 13W, 17W, 277V Lamps Wet Location



CCTs Available:



	277V PAR30 LONG NECK (E26 BASE)	277V PAR38 (E26 BASE)
MODEL NUMBER	13P30LNLED230FL	17P38LED230FL
ORDER CODE	74686	74687
Input Wattage	13W	17W
Voltage	277V	
Delivered Lumens (lm)	1,000 lm	1,700 lm
Efficacy (lm/W)	77 lm/W	100 lm/W
Color Rendering Index (CRI)	82	
Color Temperature (CCT)	3000K, 4000K	
Replacement	90W	120W
Dimming Compatible	No	
Lumen Maintenance (L70)	25,000 hours	
LISTINGS	cRUus, FCC, RoHS Compliant	



PAR - 18W, 20W, 23W, High Output Dimmable Lamps Wet Location



Additional beam angles available.

CCTs Available:



	PAR30 (E26 BASE)	PAR30 (E26 BASE)	PAR38 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	18P30WD30SP	20P30WD30NF	23P38WD30FL	23P38WD30SP
ORDER CODE	102755	102756	102758	102757
Input Wattage	18W	20W	23W	23W
Voltage	120-277V			
Delivered Lumens (lm)	1,800 lm	2,300 lm	2,650 lm	2,650 lm
Efficacy (lm/W)	100 lm/W	116 lm/W	115 lm/W	110 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3000K, 4000K			
Replacement	75W INC	75W INC	250W HAL	250W HAL
Beam Angle	15°, Spot	25°, Narrow Flood	40°, Flood	15°, Spot
Dimming Compatible	Yes - Triac/10-100%			
Lumen Maintenance (L70)	25,000 hours			
LISTINGS	cULus, RoHS Compliant			

Value PAR - 7W, 10W, 13W, Non-Dimmable Lamps PAR Lamps



CCTs Available:

3000K

	PAR20 (E26 BASE)	PAR30 (E26 BASE)	PAR38 (E26 BASE)
MODEL NUMBER	7P20NDV30FL	10P30NDV30FL	13P38NDV30FL
ORDER CODE	102646	102648	102650
Input Wattage	7W	10W	13W
Voltage	120V		
Delivered Lumens (lm)	425 lm	750 lm	1,000 lm
Efficacy (lm/W)	60 lm/W	75 lm/W	76 lm/W
Color Rendering Index (CRI)	≥82		
Color Temperature (CCT)	3000K		
Replacement	50W INC	65W INC	90W INC
Beam Angle	40°, Flood		
Dimming Compatible	No		
Lumen Maintenance (L70)	11,000 hours		
LISTINGS	cULus, RoHS Compliant		



T8 U-Bend - 13W, LED 6 Inch, (UL-A) Direct Fit



CCTs Available:

3500K

T8 U-BEND (G13 PIN BASE)

MODEL NUMBER	U13T8DF235
ORDER CODE	1409015
Input Wattage	13W (Bare Lamp)
Voltage	(Ballast Dependent)
Delivered Lumens (lm)	1,800 lm
Color Rendering Index (CRI)	85
Color Temperature (CCT)	3500K
Replacement	32W FLUOR
Dimming Compatible	No
Lumen Maintenance (L70)	50,000 hours
LISTINGS	UL, DLC

4000K & 5000K options also available.

T8 U-Bend - 15.5W, LED 6 Inch, (UL-B) Ballast Bypass



CCTs Available:

3500K

4000K

T8 U-BEND (PLASTIC, G13 PIN BASE)

T8 U-BEND (PLASTIC, G13 PIN BASE)

MODEL NUMBER	U15.5T8SE235	U15.5T8SE240
ORDER CODE	1409561	1409562
Input Wattage	15.5W	
Voltage	120-277V	
Delivered Lumens (lm)	1,800 lm	1,850 lm
Efficacy (lm/W)	116 lm/W	119 lm/W
Color Rendering Index (CRI)	80	
Color Temperature (CCT)	3500K	4000K
Replacement	32W FLUOR	
Dimming Compatible	No	No
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL Classified, rUL, DLC	

T8 Tube, 9.5W, LED 4FT, (UL-A) Direct Fit



CCTs Available:

4' T8
(COATED GLASS, G13 PIN BASE)4' T8
(COATED GLASS, G13 PIN BASE)

MODEL NUMBER	L9.5T8DF435-CG (Special Order Only)	L9.5T8DF440-CG
ORDER CODE	14099192	14099190
Input Wattage	9.5W (Bare Lamp)	
Voltage	120V-347V (Ballast Dependent)	
Delivered Lumens (lm)	1,700 lm	
Efficacy (lm/W)	131 lm/W	
Color Rendering Index (CRI)	82	
Color Temperature (CCT)	3500K	4000K
Replacement	32W FLUOR	
Dimming Compatible	Yes (Ballast Dependent)	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL, ETL Sanitation, DLC	

T8 Tube, 10.5W, LED 4FT, (UL-A) Direct Fit



CCTs Available:



4' T8 (GLASS, G13 PIN BASE)

4' T8 (GLASS, G13 PIN BASE)

MODEL NUMBER	L10.5T8DF440-GA	L14T8DF440-GA2
ORDER CODE	103331	103334
Input Wattage	10.5W (Bare Lamp)	14.5W (Bare Lamp)
Voltage	120V-277V	
Delivered Lumens (lm)	1,800 lm	2,200 lm
Efficacy (lm/W)	138 lm/W	129 lm/W
Color Rendering Index (CRI)	80	
Color Temperature (CCT)	4000K	
Replacement	32W FLUOR	
Dimming Compatible	Yes (Ballast Dependent)	No
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL, DLC	

T8 Tube, 13W, LED 4FT, (UL-A) Direct Fit



CCTs Available:

4' T8
(COATED GLASS, G13 PIN BASE)4' T8
(COATED GLASS, G13 PIN BASE)4' T8
(COATED GLASS, G13 PIN BASE)

MODEL NUMBER	L13T8DF435-CG5	L13T8DF440-CG5	L13T8DF450-CG5
ORDER CODE	14098818	14098819	107223
Input Wattage	13W (Bare Lamp)		
Voltage	120V-347V		
Delivered Lumens (lm)	1,800 lm	1,850 lm	1,900 lm
Efficacy (lm/W)	116 lm/W	116 lm/W	119 lm/W
Color Rendering Index (CRI)	83		
Color Temperature (CCT)	3500K	4000K	5000K
Replacement	32W FLUOR		
Dimming Compatible	Yes (Ballast Dependent)		
Lumen Maintenance (L70)	50,000 hours		
LISTINGS	UL, ETL Sanitation, DLC		

T8 Tube, 12W, LED 4FT, Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12.5T8SE435-CG	L12.5T8SE440-CG	L12.5T8SE450-CG
ORDER CODE	14098989	14098990	1098991
Input Wattage		12.5W	
Voltage		120-277V	
Delivered Lumens (lm)	1,600 lm	1,650 lm	1,650 lm
Efficacy (lm/W)	132 lm/W	140 lm/W	144 lm/W
Color Rendering Index (CRI)		≥ 80	
Color Temperature (CCT)	3500K	4000K	5000K
Replacement		32W FLUOR	
Dimming Compatible		No	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	UL Classifield, DLC		

T8 Tube, 16.5W, LED 4FT, Single-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L16.5T8SE435-CG	L16.5T8SE440-CG	L16.5T8SE450-CG
ORDER CODE	14098994	14098995	14098996
Input Wattage		16.5W	
Voltage		120-277V	
Delivered Lumens (lm)	2,200 lm	2,300 lm	2,400 lm
Efficacy (lm/W)	133 lm/W	139 lm/W	145 lm/W
Color Rendering Index (CRI)		≥ 80	
Color Temperature (CCT)	3500K	4000K	5000K
Replacement		32W FLUOR	
Dimming Compatible		No	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	UL Classifield, DLC		

T8 Tube, 9W, LED 2FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2' T8 (COATED GLASS, G13 PIN BASE)	2' T8 (COATED GLASS, G13 PIN BASE)	2' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9T8DE235-CG4	L9T8DE240-CG4	L9T8DE250-CG4
ORDER CODE	1409552	1409553	1409554
Input Wattage		9W	
Voltage		120-277V	
Delivered Lumens (lm)	1,125 lm	1,200 lm	1,250 lm
Efficacy (lm/W)	125 lm/W	133 lm/W	139 lm/W
Color Rendering Index (CRI)		≥ 80	
Color Temperature (CCT)	3500K	4000K	5000K
Replacement		17W FLUOR	
Dimming Compatible		No	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	UL Classified, ETL, DLC		

T8 Tube, 12W, LED 3FT, Single/ Double-Ended Power (UL-B) Ballast Bypass




CCTs Available:

3500K 4000K 5000K



	3' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)	3' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L12T8DE335-CG4	L12T8DE340-CG4	L12T8DE350-CG4
ORDER CODE	1409555	1409556	1409557
Input Wattage		12W	
Voltage		120-277V	
Delivered Lumens (lm)	1,225 lm	1,250 lm	1,300 lm
Efficacy (lm/W)	102 lm/W	104 lm/W	108 lm/W
Color Rendering Index (CRI)		≥ 80	
Color Temperature (CCT)	3500K	4000K	5000K
Replacement		25W FLUOR	
Dimming Compatible		No	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	UL Classified, ETL, DLC		

T8 Tube, 9.8W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:

4000K 5000K



	4' T8 (COATED GLASS, G13 PIN BASE)	4' T8 (COATED GLASS, G13 PIN BASE)
MODEL NUMBER	L9.8T8DE440-CG	L9.8T8DE450-CG
ORDER CODE	104710	104711
Input Wattage		9.8W
Voltage		120-277V
Delivered Lumens (lm)	1,675 lm	1,700 lm
Efficacy (lm/W)	171 lm/W	173 lm/W
Color Rendering Index (CRI)		≥ 80
Color Temperature (CCT)	4000K	5000K
Replacement		32W FLUOR
Dimming Compatible	No	No
Lumen Maintenance (L70)		50,000 hours
LISTINGS	UL Classified, ETL, DLC	

T8 Tube, 11.5W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:

3500K 4000K 5000K



	4' T8 (COATED GLASS, G5 PIN BASE)	4' T8 (COATED GLASS, G5 PIN BASE)	4' T8 (COATED GLASS, G5 PIN BASE)
MODEL NUMBER	L11.5T8DE435-CG4	L11.5T8DE440-CG4	L11.5T8DE450-CG4
ORDER CODE	1409558	1409559	1409560
Input Wattage		11.5W	
Voltage		120-277V	
Delivered Lumens (lm)		1,800 lm	
Efficacy (lm/W)		156 lm/W	
Color Rendering Index (CRI)		≥ 83	
Color Temperature (CCT)	3500K	4000K	5000K
Replacement		32W FLUOR	
Dimming Compatible		No	
Lumen Maintenance (L70)		50,000 hours	
LISTINGS	UL Classified, ETL Sanitation, DLC		

T8 Tube, 9.5W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



Special Order Only

MODEL NUMBER	L9.5T8SDE430-CG	L9.5T8SDE435-CG	L9.5T8SDE440-CG	L9.5T8SDE450-CG
ORDER CODE	111590	111270	111271	111272
Input Wattage	9.5W			
Voltage	120-277V			
Delivered Lumens (lm)	1600-1650 lm			
Efficacy (lm/W)	168-173 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Power Factor	≥ 0.9			
Dimming Compatible	No			
Lumen Maintenance (L70)	≥ 50,000 hours			
LISTINGS	cULus listed, FCC, Rohs Compliant, NSF/ANSI 2 - Food Equipment			

T8 Tube, 10.5W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



MODEL NUMBER	L10.5T8SDE435-CG1	L10.5T8SDE440-CG1	L10.5T8SDE450-CG1
ORDER CODE	110344	110345	110346
Input Wattage	10.5W		
Voltage	120-277V, 50/60Hz		
Delivered Lumens (lm)	1600-1650 lm		
Efficacy (lm/W)	152-157 lm/W		
Color Rendering Index (CRI)	≥ 80		
Color Temperature (CCT)	3500K	4000K	5000K
Power Factor	≥ 0.9		
Dimming Compatible	No		
Lumen Maintenance (L70)	≥50,000 Hrs		
LISTINGS	UL classified, FCC		

T8 Tube, 12W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



Special Order Only

MODEL NUMBER	L12T8SDE430-CG	L12T8SDE435-CG	L12T8SDE440-CG	L12T8SDE450-CG
ORDER CODE	111767	111768	111769	111770
Input Wattage	12W			
Voltage	120-277V			
Delivered Lumens (lm)	1600-1650 lm			
Efficacy (lm/W)	168-173 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Power Factor	≥ 0.9			
Dimming Technology	No			
Lumen Maintenance (L70)	≥ 50,000 hours			
LISTINGS	cULus listed, FCC, Rohs Compliant, NSF/ANSI 2 - Food Equipment			

T8 Tube, 15W, LED 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



Special Order Only



CCTs Available:



MODEL NUMBER	L15T8SDE430-CG2	L15T8SDE435-CG2	L15T8SDE440-CG2	L15T8SDE450-CG2
ORDER CODE	111771	111772	111773	111774
Input Wattage	15W			
Voltage	120-277V			
Delivered Lumens (lm)	2100-2200 lm			
Efficacy (lm/W)	140-146 lm/W			
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3000K	3500K	4000K	5000K
Power Factor	≥ 0.9			
Dimming Technology	No			
Lumen Maintenance (L70)	≥ 50,000 hours			
LISTINGS	cULus listed, FCC, RoHS Complaint, NSF/ANSI 2 - Food Equipment			

T8 Tube, 38W, LED 8FT, Double-Ended Power (UL-B) Ballast Bypass



Special Order Only



CCTs Available:



MODEL NUMBER	L38T8DEFA835-CG	L38T8DEFA840-CG	L38T8DEFA850-CG
ORDER CODE	109130	109132	109133
Input Wattage	38W		
Voltage	120-277V, 50/60Hz		
Delivered Lumens (lm)	5400 lm		
Efficacy (lm/W)	142 lm/W		
Color Rendering Index (CRI)	≥ 80		
Color Temperature (CCT)	3500K	4000K	5000K
Power Factor	≥ 0.9		
Dimming Compatible	No		
Lumen Maintenance (L70)	≥50,000 Hrs		
LISTINGS	cULus Classified, cURus Recognized, FCC, ETL Sanitation Listed		

T5 Tube, 12W, 13W, 16W, 25W LED 2FT, 3FT, & 4FT, Single/ Double-Ended Power (UL-B) Ballast Bypass



CCTs Available:



	2FT	3FT	4FT	4FT
MODEL NUMBER	L12T5DE235-CG	L13T5DE435-CG	L16T5DE335-CG	L25T5DE435-CG
ORDER CODE	105045	105051	105048	105054
Input Wattage	12W	13W	16W	25W
Voltage	120-277V			
Delivered Lumens (lm)	1500-1600 lm	1600-1700 lm	2000-2100 lm	3400-3500 lm
Efficacy (lm/W)	125/133 lm/W	123-131 lm/W	125/131 lm/W	136-140 lm/W
Color Rendering Index (CRI)	≥80			
Color Temperature (CCT)	3500K, 4000K, 5000K			
Power Factor	≥0.90			
Beam Angle	>280°			
Operating Temperature	-4°F to 113°F (-20°C to 45°C)			
Lumen Maintenance (L70)	≥50,000 Hrs			
LISTINGS	UL listed for Dry/Damp Locations			

Battery Back Up for Type B Linear Tubes (10.5W and 11.5W)



MODEL NUMBER	T8B-BBU-S
ORDER CODE	110343
Input Wattage	10, 5W and 115W
Voltage	120-277V
LISTINGS	UL, ETL Sanitation, DLC

Emergency Battery Backup For Type-B Linear Lamps



MODEL NUMBER	T8B-BBU
ORDER CODE	103546
Input Wattage	5W
Voltage	120-277V
LISTINGS	UL, ETL Sanitation, DLC

Emergency Battery Backup For Type-C Linear Lamps



MODEL NUMBER	T8C-BBU
ORDER CODE	103548
Input Wattage	7W
Voltage	120-277V
LISTINGS	UL

LED Single-End Powered T8 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	3 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS
MODEL NUMBER	G13KIT1	G13KIT2	G13KIT3	G13KIT4
ORDER CODE	1409026	1409027	1409028	1409029
Lamps Configuration	1	2	3	4

LED Single-End Powered T5 Wiring Harnesses



	1 LAMP WIRING HARNESS	2 LAMP WIRING HARNESS	4 LAMP WIRING HARNESS	6 LAMP WIRING HARNESS
MODEL NUMBER	G5KIT1	G5KIT2	G5KIT4	G5KIT6
ORDER CODE	14098784	14098785	14098786	14098787
Lamps Configuration	1	2	3	4

G13 U-Bend Bypass T8 Non-Shunted Lamp Holder



MODEL NUMBER	G13UNS
ORDER CODE	14098795

G13 Low Profile T8 Non-Shunted Lamp Holder



MODEL NUMBER	G13LPNS
ORDER CODE	73978

12V Wedge - 2.5W, LED Retrofit Miniature Lamp



12V (WEDGE BASE)

MODEL NUMBER	2.5WDGLED27
ORDER CODE	74108
Input Wattage	2.5W
Voltage	12V AC/DC
Delivered Lumens (lm)	180 lm
Efficacy (lm/W)	72 lm/W
Color Rendering Index (CRI)	80
Color Temperature (CCT)	2700K
Replacement	20W HAL
Dimming Compatible	No
Lumen Maintenance (L70)	25,000 hours
LISTINGS	TUV

CCTs Available:

2700K


G9 - 3W, 5W, LED Retrofit Miniature Lamp



	NON-DIM (G9 BASE)	DIM (G9 BASE)	NON-DIM (G9 BASE)	DIM (G9 BASE)
MODEL NUMBER	3G9LED27	3G9DLED27	5G9LED27	5G9DLED27
ORDER CODE	108071	108072	108073	108074
Input Wattage	3W	3W	5W	5W
Voltage	120V			
Delivered Lumens (lm)	270 lm	270 lm	480 lm	360 lm
Efficacy (lm/W)	90 lm/W	90 lm/W	96 lm/W	72 lm/W
Color Rendering Index (CRI)	80			
Color Temperature (CCT)	2700K			
Replacement	25W INC	25W INC	40W INC	40W INC
Dimming Compatible	No	Yes	No	Yes
Lumen Maintenance (L70)	25,000 hours			
LISTINGS	TUV			

CCTs Available:

2700K

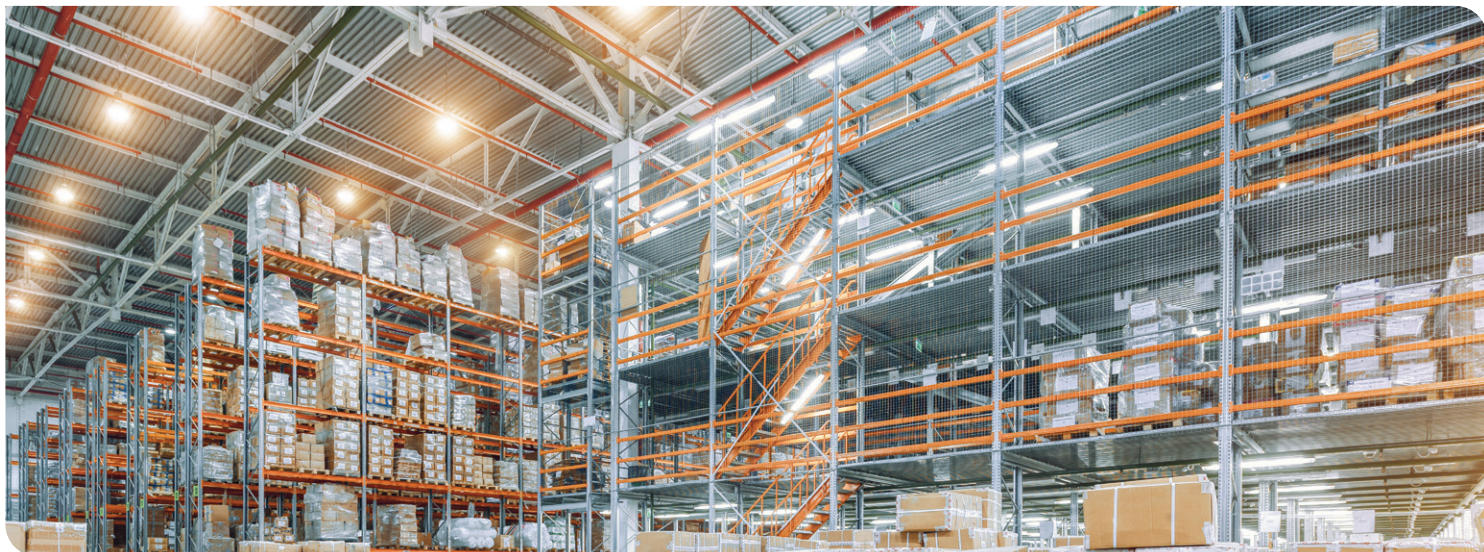

LED Highbay Ballast Bypass Lamps



CCTs Available:

5000K



	MOGUL BASE	MOGUL BASE
MODEL NUMBER	E80MH850B	E115MH850B
ORDER CODE	104757	104759
Input Wattage	80W	115W
Voltage	120-277V	
Delivered Lumens (lm)	10,800 lm	15,500 lm
Efficacy (lm/W)	140 lm/W	
Color Rendering Index (CRI)	80	
Color Temperature (CCT)	5000K	
Replacement	Yes	
Lumen Maintenance (L70)	50,000 hours	
LISTINGS	UL	

LED Post Tops



CCTs Available:

3000K

4000K

5000K



	POST TOP (E26 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)	POST TOP (E39 BASE)
MODEL NUMBER	27PTE26WCS	36PTEX39WCS	45PTEX39WCS	54PTEX39WCS	100PTEX39WCS
ORDER CODE	109018	109019	109020	109021	109022
Input Wattage	12W/18W/27W	18W/27W/36W	27W/36W/45W	36W/45W/54W	63W/83W/100W
Voltage	120V-277V				
Delivered Lumens (lm)	1200-3400 lm	1900-4700 lm	2900-5600 lm	3900-6750 lm	6500-11500 lm
Efficacy (lm/W)	120, 135, 125 lm/W	120, 135, 125 lm/W	120, 135, 125 lm/W	120, 135, 125 lm/W	115, 135, 125 lm/W
Color Rendering Index (CRI)	80				
Color Temperature (CCT)	3000K, 4000K, 5000K				
Replacement	100W MH	150W MH	175W MH	200-250W MH	400W MH
Lumen Maintenance (L70)	50,000 hours				
LISTINGS	UL, FCC				



PHOTOCELL
SENSOR

DTDS-PT
103637



MICROWAVE
SENSOR

MS-PT
103638



PIR SENSOR

PIR-PT
103636

MaxLite Home™

Re-Inventing Residential

MaxLite has re-invented its residential line of products with multiple energy efficient products that fit every corner of the house. Along with its ENERGYSTAR lamps and lighting fixtures MaxLite has launched its very popular line of air purifiers and smart power strips and plugs. The MaxLite Home line of products provides energy efficient reliability at a budget friendly price for both single family and multi-family residences.



Learn More at:
www.maxlite.com/maxlite-home



WarrantyMax™ 10-Year Warranty

Key Features

Customers receive automatic 10-Year warranty coverage of most commercial and industrial LED fixtures - no registration or minimum product purchase required!*

	HIGHLIGHTS
Eligibility	Automatic with purchase *registration required for labor allowance
Start Date	Actual installation date, or 90 days after the original date of purchase (whichever comes first)
Minimum Purchase	No
Labor Allowance	\$25 / Unit on eligible models; Higher levels available for purchase
Operating Hours	16 hours/day maximum
Operating Temperature	-29°F to 104°F outdoor -4°F to 77°F indoor
Additional Coverage Available	YES!

Additional Coverage Available for:



Eligible products with a warranty of less than 10 years



Higher labor allowance (\$350 coverage minimum applies; contact your MaxLite sales representative for details)

Extended coverage must be registered within 90 days of original purchase. All warranties are in effect only if the products are installed for and used in an application and operating temperature range for which it is rated, per the applicable product data sheet.

Warranty registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at:

www.maxlite.com/warranties

MaxLite may refuse, at its sole discretion, to allow extended warranty coverage to be added.

Standard Product Warranty Coverage

Check product datasheets for specific warranty coverage.



NOTES:

- For any question about warranty coverage contact MaxLite for warranty information.
- Any products marked as Clearance shall carry the lesser of a 5 Year warranty, or the warranty period stated on the product data sheet.
- All 10 Year warranties are based on a maximum 16 hrs/day operation, and ambient temperature of -29°F to 104°F (outdoor) and -4°F to 77°F (indoor), and include up to a \$25 labor allowance per item (registration for labor allowance required). If ambient temperatures fall outside the -4°F to 77°F range, product is warranted for 5 years according to the operating temperature range specified on the PDS.
- Extended warranty coverage may be purchased for products with a 5-year warranty, or for a higher labor allowance on products with a 10-year warranty. Standard warranty terms and conditions apply. Contact your MaxLite representative for product eligibility and pricing. Minimum purchase and site registration required.
- Warranty start date is the earlier of the actual installation date, or 90 after the original purchase (whichever comes first).
- It is not a requirement to register the warranty to receive product replacement warranty coverage; however, you must register the warranty if you want to be eligible to receive the labor allowance associated with the 10 Year Warranty.
- Accessories and emergency battery backup excluded. Motion sensor and Photocontrol components follow supplier's warranty.
- Warranty claim and registration forms, and complete Standard Product Warranty Coverage Terms and Conditions, are available at: www.maxlite.com/warranties

Terms subject to change. Go to MaxLite.com for complete Standard Product Warranty Terms and Conditions.



VALUE SERIES


Quality That Fits Your Budget!



The Value Series provides energy efficient brightness with reliability at a budget friendly price ensuring effective lighting without compromising quality.



Value Panel
MLFPxxE Series

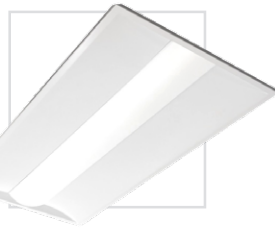

Value Troffers
TV / TRKE Series



Value HighBay
HLE / BPHE3 Series



Value Linear
LSE / UE / VE Series



Value Canopy
CP Series



Value Area
AE Series



Value Wall Packs
WCOP / WCF / WTC Series



Value Floods
MSF Series

Contact your MaxLite representative for details!



www.maxlite.com/value-series

MaxLite® Brands

MaxLite®

A NEW WAVE OF LIGHT



**ENHANCED
SERIES**



**VALUE
SERIES**

CMMax™

LIGHTING CONTROLS

CMMax™ BC

BASIC LIGHTING CONTROLS

CMMax™ NC

NETWORK LIGHTING CONTROLS

CMMax™ NP

NETWORK PARTNERS

CMMax™ RF


EasyRF™ CONTROLS **Coming Soon!**

MaxLiteHome™

MaxLitePro®

MaxLite Tools & Resources

YouTube Channel (MaxLiteNewsRoom)

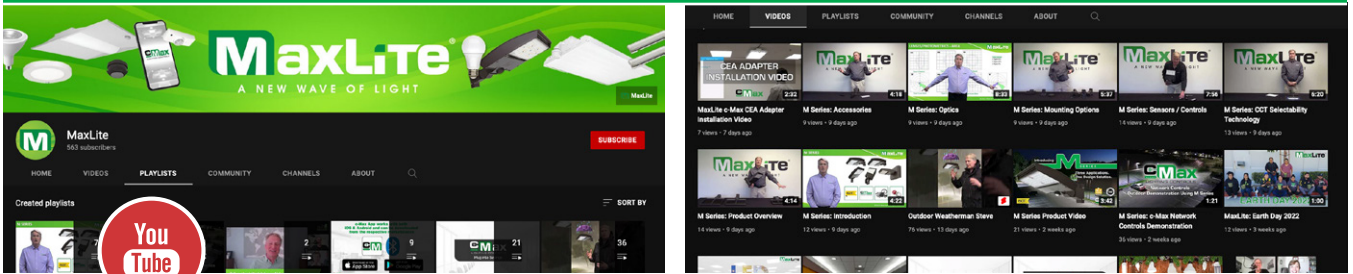

Product Training Videos | Installation Videos

Social Media (Find, Like and Follow us on...)




LinkedIn

Twitter
@MaxLite

Facebook
@maxliteled


Instagram
@maxliteled

MaxLite.com

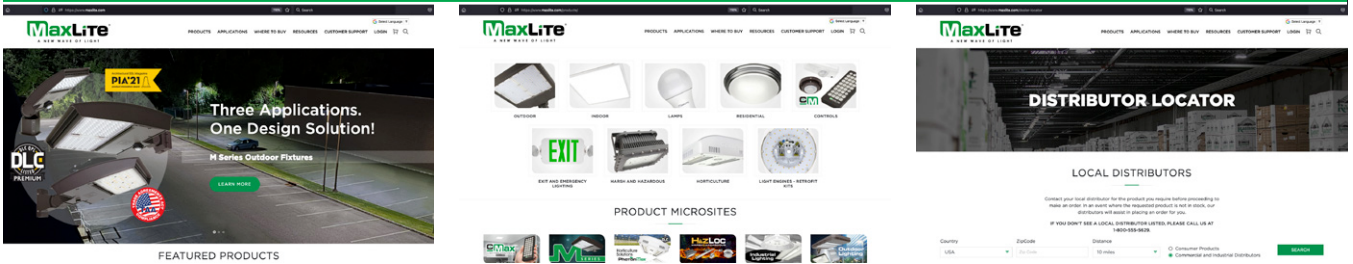

Product Datasheets | Case Studies | Catalogs & Brochures | ROI Calculator | Utility Rebate Finder | ENERGY STAR

MaxLiteUniversity.com

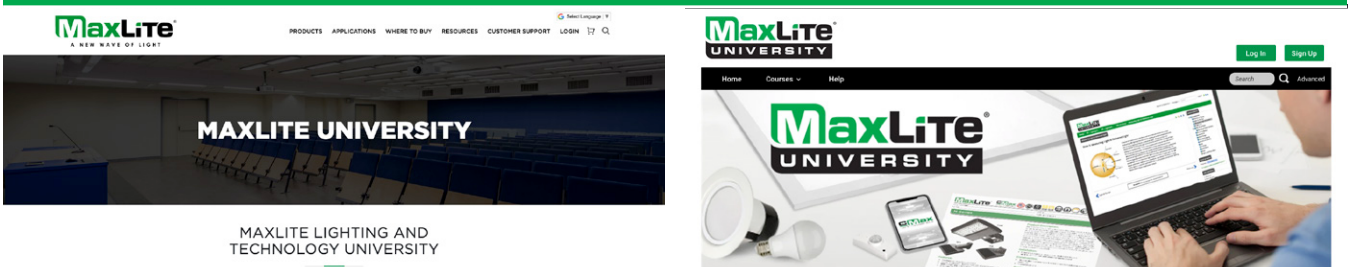

Free online lighting degree program | Eligible for ALA Credit Hours

Product Specific Micro Sites



www.maxlite.com/cmmax



www.maxlite.com/mseries



www.maxlite.com/maxlite-home



www.maxlite.com/hazloc



www.maxlite.com/industrial-and-commercial-lighting



www.maxlite.com/Outdoor-Lighting

MaxLite®

A NEW WAVE OF LIGHT

Find, like and follow us on social media



Corporate Headquarters
342 Changebridge Road,
Suite 201, Pine Brook, NJ 07058

Indiana Facility
305 Chaney Ave., Suite B
Greenwood, IN 46143

California Facility
1148 North Ocean Circle
Anaheim, CA 92806

Phone: 1-800-555-5629 | E-mail: info@maxlite.com

Item#: LEDGENCAT | Order Code: 109088